



**AVE-6520**

**Large Format Interactive Display**



**Model AVE-6520 Installation and Operation Manual**

## **COPYRIGHT AND TRADEMARKS:**

©Copyright 2019. This document contains proprietary information protected by copyright, trademark and other intellectual property laws. All rights are reserved. No part of this manual may be reproduced by any mechanical, electronic or other means, in any form, without our prior written permission.

The trademarks reproduced in this document and used on the products are either owned or licensed by us, or by their respective holders. You may not reproduce or use the trademarks without our prior written consent.

# Important Safety Instructions

- Before using this display, please read this user manual thoroughly to help protect against property damage and to ensure your personal safety and the safety of others.
- Be sure to observe the following instructions.
- For your safety, be sure to observe the warnings located in this manual.
- For installation or adjustment, please follow the instructions in this manual and refer all servicing to qualified service personnel.

## Safety Precautions

- If smoke or a peculiar smell comes from the display, remove the power plug from the outlet immediately.
- Failure to do so may result in fire or electrical shock. Contact your dealer for inspection.
- If the display has been turned on but there isn't a picture, remove the power plug from the outlet immediately.
- Failure to do so may result in fire or electrical shock. Contact your dealer for inspection.
- If water is spilled or objects are dropped inside the display, remove the power plug from the outlet immediately.
- Failure to do so may result in fire or electrical shock. Contact your dealer for inspection.
- If the display is dropped or the cabinet is damaged, remove the power plug from the outlet immediately.
- Failure to do so may result in fire or electrical shock. Contact your dealer for inspection.
- To turn off the power of the display, press "O" on the main power switch at side of display.
- The power standby/on indicator will go off and the display cannot to be turned on/off by using the POWER button on the remote control. (To turn on/off the display by the remote control, press the main power switch again and light the power standby/on indicator.)
  - ◆ When turning off the display by pressing the POWER button on the remote control, the main power of the display is not turned off completely.
  - ◆ To disconnect power completely, remove the power plug from the outlet.
- If the power cord or plug is damaged or becomes hot, turn off the main power switch of the display, make sure the power plug has cooled down and remove the power plug from the outlet.
- If the display is still used in this condition, it may cause fire or electrical shock. Contact your dealer for replacement.

## Installation

- Don't install in a high-temperature environment.
- If the display is used in high-temperature or in direct sunlight, it may cause the case or other parts to become distorted or damaged, resulting in overheating or electrical shock.
- Don't install in a high-humidity environment.
- This may cause overheating or electrical shock.
- Don't install near any heat sources such as radiators, heat registers, stoves, or other apparatus that produce heat.
- This may cause fire or electrical shock.
- Don't overload outlets or cables beyond electrical capacity.
- Don't use extension cords as it may cause fire or electrical shock.
- Don't insert the power plug into an outlet other than 100~240V AC.
- This may cause fire or electrical shock.
  - ◆ Don't use a damaged power plug or worn outlet.
  - ◆ Don't insert an improper power plug it may cause fire or electric shock.
- Don't place the display on an unstable shelf or surface.
- The display may fall, causing injury. Please install on a horizontal, stable, level surface.
- Don't place objects on the display.
  - ◆ If the display is covered or the vents are blocked, the display could overheat and cause a fire.
  - ◆ If metal or liquid gets into the display, it may cause fire or electrical shock.
  - ◆ Do not put heavy objects on the display as they may fall, causing injury.
  - ◆ Please keep a 10 cm minimum distance between the display and the wall for sufficient ventilation.
- Don't move the display when it is connected to the power cord and AV cables.
  - ◆ When moving the display, make sure to remove the power plug and cables from the outlet or source.
  - ◆ When unpacking or carrying the display, at least 2 people are needed. Make sure the display is carried upright.
  - ◆ Transport the display upright. Avoid placing the display face up or down.
  - ◆ Handle the display gently. Do not drop.

## Use

- If you encounter a problem during installation, please contact your dealer for assistance. Don't repair or open the display by yourself.
- Failure to do so may result in fire or electrical shock. Contact your dealer for inspection.
- Protect and correctly use the power cord/plug.
  - ◆ Don't pinch the power cord/plug between hard surfaces.
  - ◆ Don't step on the power cord/plug.
  - ◆ Before inserting the power plug into the wall outlet, connect the power cord to the display.
  - ◆ Don't operate the display with a damaged power cord or it may damage the display.
- Using extension cords (not recommended)
- If an extension cord must be used, ensure the voltage rating exceeds the max power consumption of the display. If the voltage rating is less than the display, it will cause the extension cord to overheat.
- If there is thunder or lightning, don't touch the display or the power plug.
- This may cause an electric shock.
- Don't use any kind of liquid on the display.
  - ◆ If liquid is spilled on the display, remove the power and ask qualified service personnel to check the display.
  - ◆ If the liquid gets on the display's screen, please clean it with a dry and soft cloth immediately.
  - ◆ Don't use any harsh chemical on the display.
  - ◆ If metal or liquid gets into the display, it may cause a fire or an electrical shock.
- Don't install or remove the power plug with wet hands.
- This may cause an electrical shock.
- If the display will not be used for a long period of time, unplug the display.
- This may cause premature wear of electrical components or fire.
- Don't press on the LCD panel.
- This may cause personal injury or panel damage.
- Don't push or shake the display.
- This may cause damage or injury.
  - ◆ If the glass of the display panel is broken, liquid may escape. Please don't touch the liquid.
  - ◆ If liquid get into your eyes or touches your skin, wash with the clean water and seek medical attention immediately.
  - ◆ Precautions with the remote control batteries
  - ◆ Please only use approved AAA type batteries.
  - ◆ Please be sure to insert batteries by matching the + and -.

- ◆ Don't recharge, heat, disassemble, short or throw batteries into a fire.
- ◆ Don't mix a new battery with a used one.
- ◆ Don't mix different types of batteries together (only use the specified type). it may cause burn and injury.

## Cleaning

- If dust has collected on the power plug, remove the plug from the outlet and clean off the dust.
- Dust build-up may cause a fire.
- Take off the power plug before cleaning.
- Failure to do so may result in electrical shock or damage.
- Cleaning the surface of the display
  - ◆ When the surface of the display becomes dirty, please wipe the surface lightly with a soft clean cloth.
  - ◆ If the surface requires additional cleaning, lightly moisten the cloth.
  - ◆ Do not to let any kind of liquid enter the display as it may cause electrical shock or damage.
  - ◆ Do not clean the display with alcohol, solvents or ammonia, as this could damage the display.

# Warnings

## Use

- Do not use the display lying flat on its back.
- Transport the display upright with proper packaging. Avoid placing the display face up or down. Be careful not to bump into the display.
- Do not send a static (non-moving) image to the display, or it may cause image 'burn-in' or image retention.
- "Burn in" and/or image retention is not covered under warranty.
- Make sure to change the image on the display periodically. It is recommended to (1) turn off the display for at least 6 hours after 18 hours of usage in a 24 hour period to help avoid image retention and (2) to turn the "IRFM" function to "ON" in the OSD menu (under "Advanced Settings").

## Exemptions

- This product isn't warranted for any damage caused by natural disaster (such as earthquake, thunder, etc.), fire, acts by third parties, accidents, owner's intentional misuse and fault, or use in other improper conditions.
- This product isn't warranted for incidental damages (such as profit loss or interruption in business, modification or erasure of record data, etc.) caused by use or inability to use of this product.
- This product isn't warranted for any damage caused by inappropriate operation, or from not following the user manual.
- This product isn't warranted for any damage caused by misuse or malfunction through simultaneous use of this product and the connected equipment or software.
- This product isn't warranted for any damage caused by neglect of the instructions described about installation.
- This product isn't warranted for any damage caused by improper installation.
- This product isn't warranted for any damage caused by disassembly, modification or repair by non-authorized service centre or people.

# Compliance Information

## DECLARATION OF CONFORMITY:

AVOCOR hereby declares that the Product's Model Numbers:

### **AVE-6520**

Conform with the provisions of:

- FCC:

FCC CFR Title 47 Part 15 Subpart B Class A, CISPR 22

ANSI C63.4

ICES-003

- CE:

EN 55032

EN 55024

EN 61000-3-2

EN 61000-3-3

- UL:

UL 60950-1

CAN/CSA-C22.2 No. 60950-1

- CB:

IEC 60950-1

- CEC:

California Code of Regulations, Title 20:Division 2, Chapter 4, Article 4, Sections 1601-1609

## FCC PART 15:

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

### **CAUTION**

Any changes or modifications not expressly approved by the grantee of this device could void the user's authority to operate the equipment.

## INDUSTRY CANADA (ICES-003):

CAN ICES-3 (A)/NMB-3(A)

## PRODUCT DISPOSAL:

The Product contains small amounts of tin, lead and/or mercury. Disposal of these materials may be regulated due to environmental considerations.

## DISPOSAL OF OLD ELECTRICAL AND ELECTRONIC EQUIPMENT (Applicable throughout the European Union and other European countries with separate collection programs)



This symbol found on your product or on its packaging, indicates that this product should not be treated as household waste when you wish to dispose of it. Instead, it should be handed over to an applicable collection point for the recycling of electrical and electronic equipment. By ensuring this product is disposed of correctly, you will help prevent potential negative consequences to the environment and human health, which could otherwise be caused by inappropriate disposal of this product.

The recycling of materials will help to conserve natural resources. This symbol is only valid in the European Union. If you wish to discard this product, please contact your local authorities or dealer and ask for the correct method of disposal.

## Notes

# Table of Contents

|                                                   |           |
|---------------------------------------------------|-----------|
| <b>Important Safety Instructions .....</b>        | <b>3</b>  |
| Safety Precautions.....                           | 3         |
| Installation.....                                 | 4         |
| Use.....                                          | 5         |
| Cleaning .....                                    | 6         |
| <b>Warnings .....</b>                             | <b>7</b>  |
| Use.....                                          | 7         |
| Exemptions .....                                  | 7         |
| <b>Compliance Information .....</b>               | <b>8</b>  |
| <b>Table of Contents.....</b>                     | <b>11</b> |
| <b>List of Figures .....</b>                      | <b>13</b> |
| <b>1. Introduction .....</b>                      | <b>15</b> |
| About This Manual .....                           | 15        |
| Target Audience .....                             | 15        |
| Textual and Graphic Conventions .....             | 15        |
| Using This Manual .....                           | 16        |
| Description, Features and Benefits .....          | 17        |
| Key Features and Benefits .....                   | 17        |
| Touch Capability.....                             | 17        |
| Parts List.....                                   | 17        |
| <b>2. Controls and Functions.....</b>             | <b>19</b> |
| Display at a Glance .....                         | 19        |
| Input Panel.....                                  | 21        |
| Remote Control Unit.....                          | 24        |
| <b>3. Installation .....</b>                      | <b>27</b> |
| Remote Control.....                               | 27        |
| Notes on Batteries .....                          | 27        |
| Notes on Remote Control Operation.....            | 27        |
| Quick Setup .....                                 | 28        |
| Installation Considerations .....                 | 28        |
| Ambient Light.....                                | 28        |
| Ambient Heat .....                                | 28        |
| Ventilation .....                                 | 29        |
| Mounting the Display .....                        | 29        |
| Connections to the Display .....                  | 30        |
| Connecting a Control System or PC.....            | 30        |
| Connecting Source Components to the Display ..... | 32        |
| Turning on the Power.....                         | 34        |
| Changing the OSD Language .....                   | 35        |
| Enabling the Touch Screen .....                   | 35        |
| <b>4. Operation.....</b>                          | <b>36</b> |
| Using the On-Screen Menus .....                   | 36        |
| Input Menu.....                                   | 38        |
| Display Settings .....                            | 40        |
| Audio Menu .....                                  | 41        |

|                                                           |           |
|-----------------------------------------------------------|-----------|
| Basic Settings.....                                       | 42        |
| Advanced Settings .....                                   | 43        |
| Network Configuration.....                                | 45        |
| Information .....                                         | 46        |
| <b>5. Maintenance and Troubleshooting .....</b>           | <b>47</b> |
| Maintenance.....                                          | 47        |
| Troubleshooting.....                                      | 47        |
| <b>6. External Control .....</b>                          | <b>50</b> |
| Serial Communications .....                               | 50        |
| RS232 Connection and Port Configuration .....             | 50        |
| Command and Response Format.....                          | 50        |
| Command and Response Examples .....                       | 51        |
| Serial Command List.....                                  | 51        |
| Using Discrete IR Codes .....                             | 57        |
| IR Command Protocol.....                                  | 57        |
| IR Control Code List.....                                 | 57        |
| <b>7. Specifications.....</b>                             | <b>59</b> |
| Supported Timings .....                                   | 60        |
| Overall Dimensions.....                                   | 62        |
| <b>Appendix I: Moving and Carrying Notice .....</b>       | <b>65</b> |
| Moving the Display.....                                   | 65        |
| Carrying the Display.....                                 | 65        |
| <b>Appendix II: Installing a Wall Mount .....</b>         | <b>66</b> |
| <b>Appendix III: Installing an OPS Module .....</b>       | <b>67</b> |
| <b>Appendix IV: Wall Mount Safety Notes.....</b>          | <b>68</b> |
| <b>Appendix V: Ethernet Remote Control Settings .....</b> | <b>70</b> |
| Configurations .....                                      | 70        |
| Administrator.....                                        | 70        |
| TCP Mode .....                                            | 73        |
| UDP Mode .....                                            | 74        |
| UART .....                                                | 75        |
| SMTP .....                                                | 76        |
| Reset Device.....                                         | 77        |

# List of Figures

FIGURE 2-1. DISPLAY FRONT/ SIDE /REAR VIEW ..... 19

FIGURE 2-2. DISPLAY INPUT PANEL VIEW ..... 21

FIGURE 2-3. DISPLAY REMOTE CONTROL UNIT ..... 24

FIGURE 3-1. VENTILATION REQUIREMENTS FOR ENCLOSURE MOUNTING..... 29

FIGURE 3-2. RS232 CONTROL SYSTEM CONNECTION ..... 30

FIGURE 3-3. ETHERNET CONNECTION..... 31

FIGURE 3-4. DISPLAYPORT SOURCE CONNECTION ..... 32

FIGURE 3-5. HDMI SOURCE CONNECTIONS ..... 33

FIGURE 3-6. VGA SOURCE CONNECTIONS ..... 34

FIGURE 3-7. TOUCH SCREEN CONTROLLER (USB) CONNECTION ..... 35

FIGURE 4-1. OSD MENU STRUCTURE..... 37

FIGURE 7-1. AVE-6520 DISPLAY DIMENSIONS (INCH) ..... 62

FIGURE 7-2. AVE-6520 DISPLAY DIMENSIONS (MM) ..... 63

## Notes

# 1. Introduction

## About This Manual

This Owner's Manual describes how to install, set up and operate the AVOCOR Series LED Display.

Throughout this manual, the AVOCOR Series LED Display is referred to as the "display".

## Target Audience

The manufacturer has prepared this manual to help installers and end users get the most out of the display.

The manufacturer has made every effort to ensure that this manual is accurate as of the date it was printed. However, because of ongoing product improvements and customer feedback, it may require updating from time to time.

## Textual and Graphic Conventions

**Text Conventions:** The following conventions are used in this manual, in order to clarify the information and instructions provided:

- Remote and built-in keypad button identifiers are set in upper-case bold type; for example, "Press **EXIT** to return to the previous menu."
- Computer input (commands you type) and output (responses that appear on-screen) is shown in monospace (fixed-width) type; for example: "To change the aspect ratio to Letterbox, type 07 00 02 41 53 50 03 08 <OK>."
- All keys with functional names are initial-capped, set in bold type and enclosed in angle brackets. These keys are the following: <OK>, <Spacebar>, <Control>, <Esc> and <Tab>. <OK> indicates that you may press either the EXIT or OK key on your keyboard if it has both keys.
- In addition to these conventions, underlining, bold face and / or italics are occasionally used to highlight important information, as in this example:



**NOTE** A carriage return must be used after each command or string.

**Graphic Conventions:** These symbols appear in numerous places throughout the manual, to emphasise points that you must keep in mind to avoid problems with your equipment or injury:



**TIP**

TIPS highlight time saving short cuts and helpful guidelines for using certain features.



**NOTE**

NOTES emphasise text with unusual importance or special significance. They also provide supplemental information.



**CAUTION**

CAUTIONS alert users that a given action or omitted action can degrade performance or cause a malfunction.



**WARNING**

WARNINGS appear when a given action or omitted action can result in damage to the equipment, or possible non-fatal injury to the user.



**DANGER!**

DANGER appears when a given action can cause severe injury or death.

## Using This Manual

Use the following table to locate the specific information you need in this manual.

| If you need...                                          | ... Turn to page:         |
|---------------------------------------------------------|---------------------------|
| General information about the AVOCOR Series LED Display | <a href="#"><u>17</u></a> |
| Installation instructions                               | <a href="#"><u>26</u></a> |
| First-time configuration instructions                   | <a href="#"><u>34</u></a> |
| Advanced configuration instructions                     | <a href="#"><u>42</u></a> |
| Troubleshooting tips                                    | <a href="#"><u>46</u></a> |
| Product specifications                                  | <a href="#"><u>58</u></a> |

## Description, Features and Benefits

The AVOCOR AVE 6520 Displays are ultra-high definition touch displays that support a full 3840x2160 @60Hz resolution and can display 8 bits, 1.07 billion colours.

They combine ultra-high resolution and unparalleled image quality with configurable I/O in a large-format display for a wide range of digital signage and control-room applications.

### Key Features and Benefits

The display offers these key features and benefits:

- Up to 3840x2160 @60 Hz resolution
- High-speed IR touch sensing for up to 20 points and 1 passive pen (for Windows system)
- Diverse video connectivities including (2) HDMI 2.0 inputs and DisplayPort 1.2 input with HDCP, and VGA
- Multiple control connectors including RS-232, 2 Touch USB, and LAN connections
- OPS (Open Pluggable Specification) slot
- Full-range internal speakers modules
- Compliance with windows 7/8/10, and Mac OS
- Flexible ON/OFF scheduler
- Long lifetime with high reliability

### Touch Capability

- Precise, highly responsive touch technology
- High touch sensitivity – no pressure required
- Any touch: finger, gloved hand or pointer
- Calibrated easily by provided software tools
- Compliant with Windows 7/8/10 and Mac OS
- Supports 1 passive pen in Windows system
- One USB cable for easy Plug-and-Play operation

### Parts List

Your display is shipped with the following items. If any items are missing or damaged, please contact your dealer or Customer Service.


- AVOCOR UHD LED Display
- Remote Control Unit and Batteries
- AC Power Cord x1 (2m, US)
- Touch Styluses x2 (1x3mm & 1x6mm)
- Eraser x1
- Cleaning Cloth x1
- Pen Holder x1
- USB Drive x1– User Manual, Touch Driver, QSG

- USB Cable x1
- HDMI Cable x2 (3m)
- QSG

## 2. Controls and Functions

### Display at a Glance

Figure 2-1 shows the key display components, and the paragraphs that follow describe them.

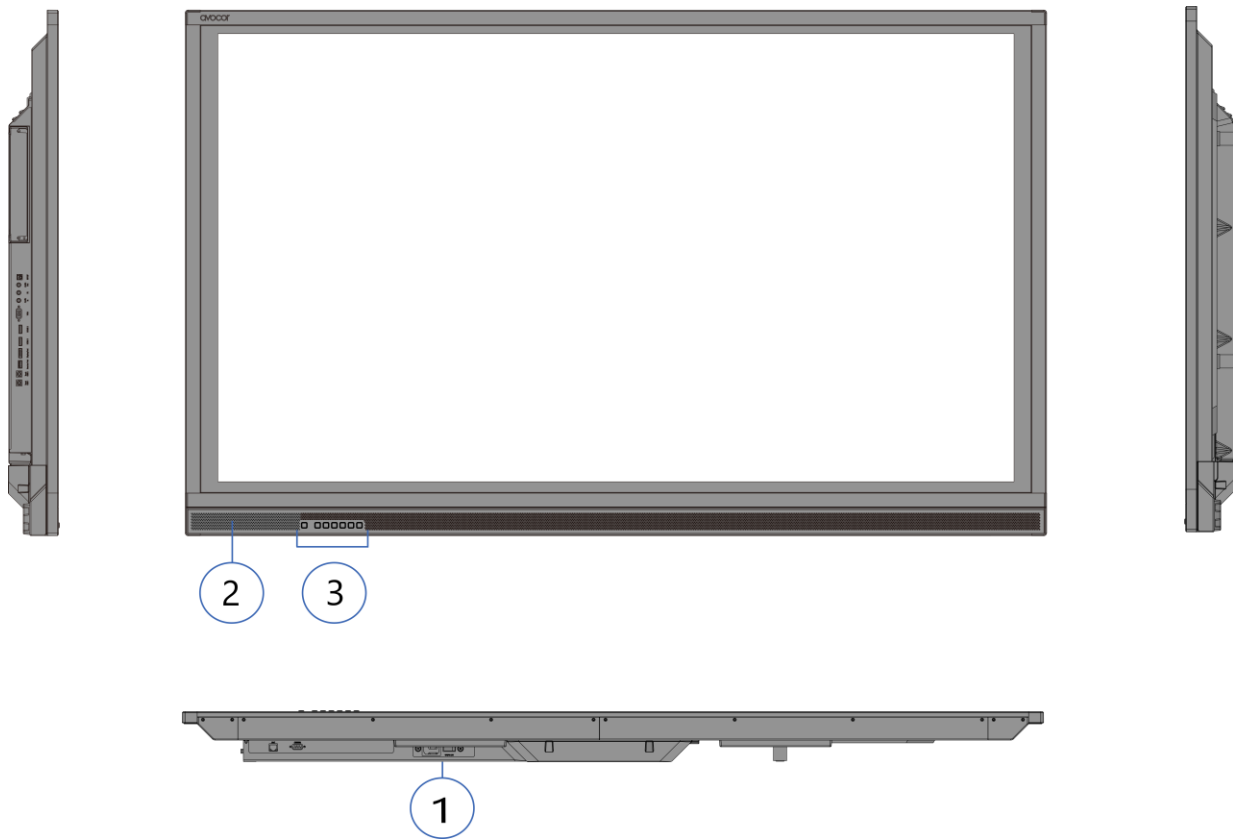

**Figure 2-1. Display Front/ Side /Rear View**

**1. MAIN POWER SWITCH**

Connects or disconnects the display panel from the AC power source.

**2. Status LED**

Solid green: display on, input detected

Blinking orange: display on, no input detected

Solid orange: display in power saving mode

Off: main power switched off

### 3. KEYPAD



You can use the keypad instead of the remote control unit to operate the on-screen display (OSD) controls. The keypad operates as follows:



#### **POWER**

Press the button to turn on/off the monitor screen.



#### **SOURCE**

Press the button to select a media source.



#### **HOME/OPS SOURCE**

Press the button to turn on the OPS or go back to the previous source.



#### **VOLUME DOWN**

Press the button to decrease the volume.



#### **VOLUME UP**

Press the button to increase the volume.



#### **FREEZE**

Press the button to freeze the display. Press again to release it.



#### **BLANK**

Press the button to blank the display. Press again to release it.

# Input Panel

Figure 2-2 shows the display input panel.

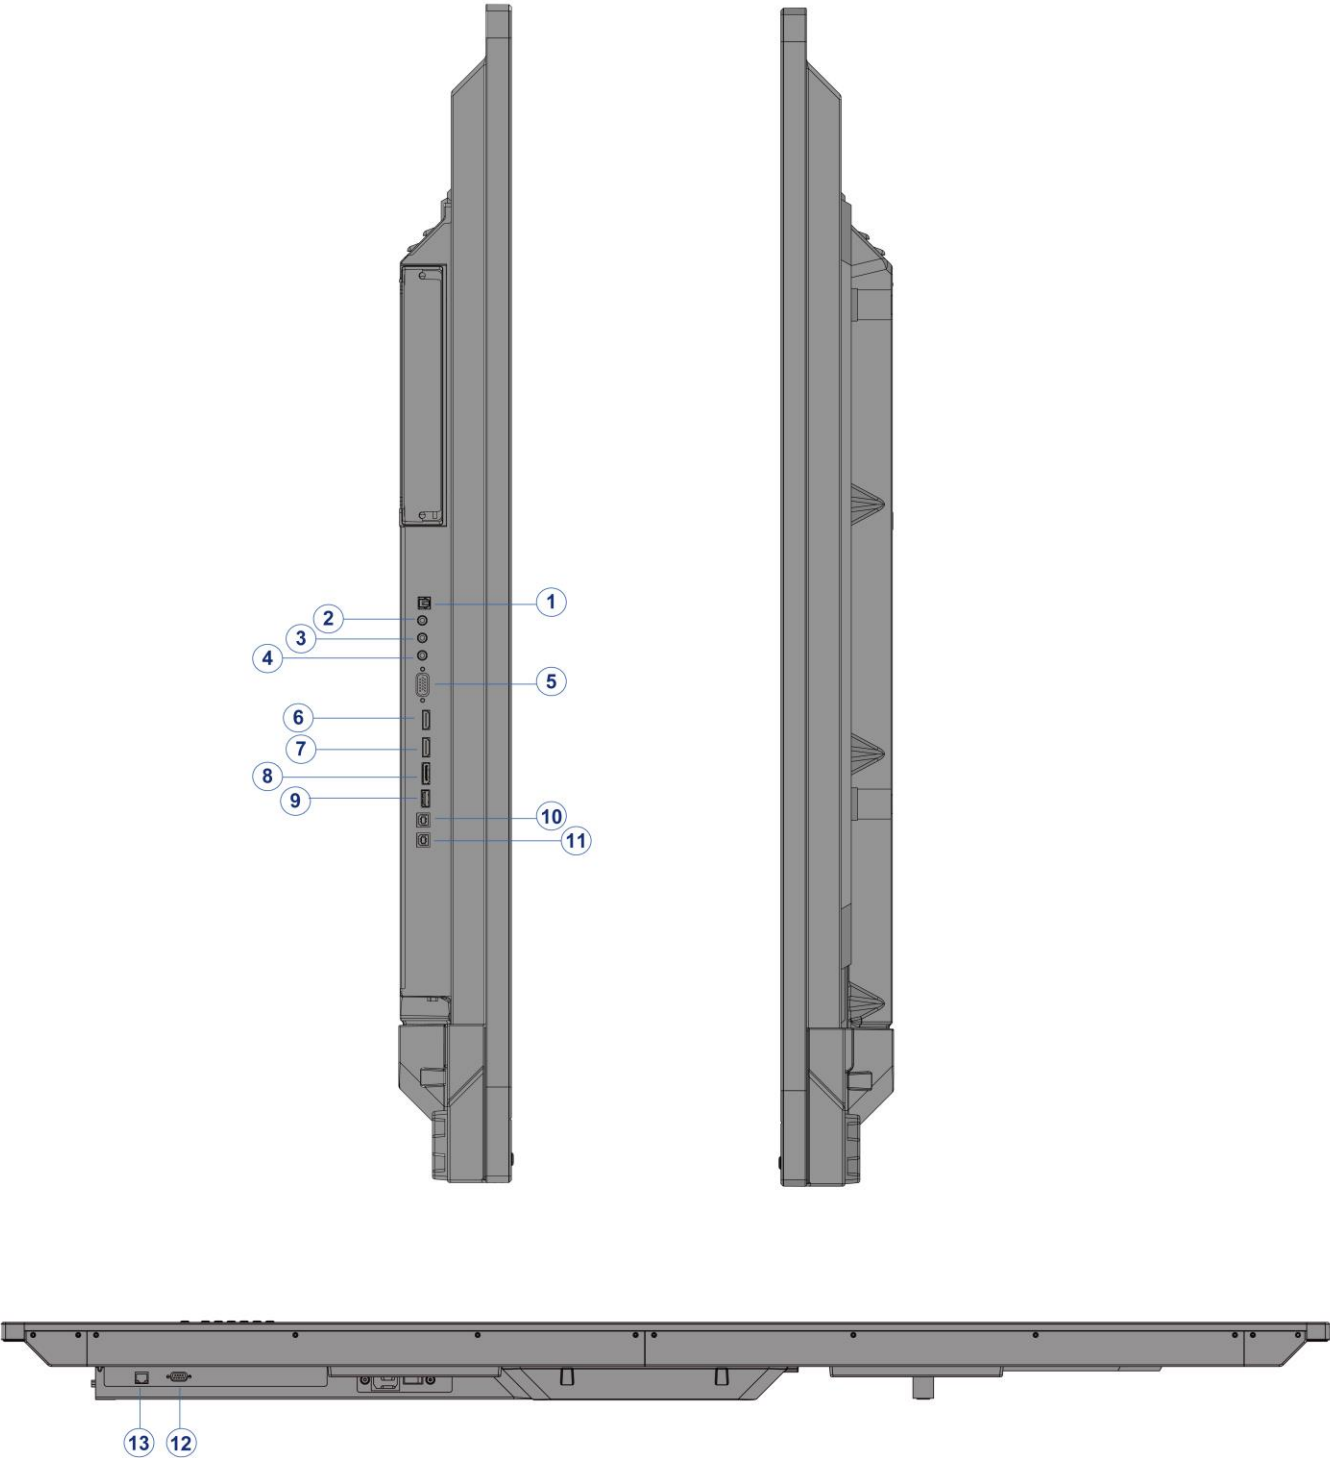


Figure 2-2. Display Input Panel View



| No.    | Connector                                                                                                                                                                             |
|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1      | <b>SPDIF</b><br>Connects external and powered digital speakers or audio receiver/amplifier.                                                                                           |
| 2      | <b>Audio Out</b><br>Connects external, powered speakers or an external audio receiver/amplifier.                                                                                      |
| 3      | <b>IR</b><br>Connects an IR Extender cable from this input.                                                                                                                           |
| 4      | <b>Audio In</b><br>Connects the audio output from a personal computer here.                                                                                                           |
| 5      | <b>VGA</b><br>Connects components that have RGB or component output jacks, such as a personal computer or external DTV decoder (a break-out cable is needed for BNC-type connection). |
| 6, 7   | <b>HDMI 1, 2</b><br>HDCP-compliant HDMI 2.0 digital video input for connecting HDMI sources.                                                                                          |
| 8      | <b>DisplayPort</b><br>DisplayPort 1.2 and DisplayPort-HDCP 1.1 compliant, SD/HD input for connecting SDTV, EDTV or HDTV component video sources.                                      |
| 9      | <b>Service Port</b><br>A standard USB Type A connector for connecting the USB stick that comes with the package to upgrade firmware.                                                  |
| 10, 11 | <b>Touch USB 1, 2</b><br>Standard, Type-B USB 2.0 ports for connecting touch sources to the display.                                                                                  |
| 12     | <b>RS232C</b><br>A female, 9-pin D-sub connector for interfacing with a PC or home theatre automation/control system.                                                                 |
| 13     | <b>LAN</b><br>An RJ-45 connector for interfacing with a PC or home theater automation/control system via a Cat 5 cable.                                                               |


# Remote Control Unit

Figure 2-3 shows the display remote control, and Table 2-1 describes its functionality.



Figure 2-3. Display Remote Control Unit

**Table 2-1. Remote Control Button Descriptions**

| Button                                                                              | Description                                                                                                                      |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
|    | <b>Power</b><br>Turns the touchscreen on and off.                                                                                |
|    | <b>Source</b><br>Selects a media source.                                                                                         |
|    | <b>Home/OPS WINPC</b><br>Select the OPS PC or go back to the previous source.                                                    |
|    | <b>Blank</b><br>Blanks the Touchscreen. Press again to restore.                                                                  |
|    | <b>Freeze</b><br>Freezes the Touchscreen. Press again to restore.                                                                |
|    | <b>Mute</b><br>Turns off the sound.                                                                                              |
|    | <b>Volume</b><br>Increases or decreases the volume by pressing the + and – keys.                                                 |
|  | <b>Low Blue Light</b><br>Selects light settings.                                                                                 |
|  | <b>Navigation Arrows</b><br>Navigates through submenus and settings.                                                             |
|                                                                                     | <b>Enter</b><br>Selects highlighted menu choice.                                                                                 |
| MENU                                                                                | Opens the on-screen menu system.<br>When the menu system is already open, pressing this button will select the previous submenu. |
| EXIT                                                                                | Closes the menu system.                                                                                                          |
| AUTO                                                                                | Auto adjustment of VGA source.                                                                                                   |
| SCALING                                                                             | Selects each aspect ratio, in sequence: Full Screen, Auto, Pillar Box.                                                           |

#### Hot keys for lock and unlock the remote control and built-in keypad

- **Lock:** Press **Enter, Enter, Exit, Exit, Enter** and **Exit** on the controller by sequence and all keys (including remote and keypad) will be locked except RS232 and power on control.
- **Unlock:** Press **Enter, Enter, Exit, Exit, Enter** and **Exit** on the controller by sequence again and all keys will be unlocked.

- **Blue Light “-”:** Select Blue light mode (Brightness: Full, High, Standard, Low, Lower)
- **Blue Light “+”:** Select Blue light mode (Brightness: Lower, Low, Standard, High, Full)

## 3. Installation



**NOTE** Installation must be performed by a qualified custom video installation specialist.

### Remote Control

To install batteries in the remote control:

1. Press down the tab on the cover and pull the cover up.
2. Insert the included batteries. Ensure that the polarities correctly match the  $\oplus$  and  $\ominus$  markings inside the battery component.
3. Insert the lower tab of the cover into the opening, and press down the cover until it clicks in place.

### Notes on Batteries

Make sure that the battery polarities are correct when installing the batteries.

- Do not mix an old battery with a new one or different types of batteries.
- If you will not use the remote control for a long time, remove the batteries to avoid damage from battery leakage.
- Do not expose batteries to excessive heat such as from sunshine, fire or the like.

### Notes on Remote Control Operation

- Make sure that there is nothing obstructing the infrared beam between the remote control and the IR receiver on the display.
- If the effective range of the remote control decreases, or it stops working, replace the batteries with new ones.
- The remote control may fail to operate if the infrared remote sensor is exposed to bright sunlight or fluorescent lighting.
- Ambient conditions may possibly impede the operation of the remote control. If this happens, point the remote control at the display, and repeat the operation.

## Quick Setup

Table 3-1 gives a quick overview of the display installation process. The sections following this one provide detailed instructions.

**Table 3-1. Installation Overview**

| Step | Procedure                                                                                                                                                                                                                                                                              | For Details<br>Refer to page... |
|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|
| 1    | Mount the display(s) on a wall (optional)                                                                                                                                                                                                                                              | <a href="#">28</a>              |
| 2    | Connect other external equipment to the display (optional):<br>Automation/control system (RS232, Ethernet)                                                                                                                                                                             | <a href="#">29</a>              |
| 3    | Connect signal sources to the display                                                                                                                                                                                                                                                  | <a href="#">31</a>              |
| 4    | Apply power to the display                                                                                                                                                                                                                                                             | <a href="#">33</a>              |
| 5    | Change the OSD language (optional)                                                                                                                                                                                                                                                     | <a href="#">34</a>              |
| 6    | Display calibration - adjust the following <i>for each input</i> : <ul style="list-style-type: none"><li>• Aspect ratio</li><li>• Brightness</li><li>• Contrast</li><li>• Colour temperature and white balance</li><li>• Color level</li><li>• Tint</li><li>• Input position</li></ul> | <a href="#">37</a>              |

## Installation Considerations

Proper installation of your display will ensure a satisfying viewing experience. Whether a display is installed temporarily or permanently, the following should be taken into account to ensure the best performance of the display.

### Ambient Light


In general, minimise or eliminate light sources directed at the screen. Contrast ratio in your images will be noticeably reduced if light directly strikes the screen, such as when a shaft of light from a window or floodlight falls on the image. Images may then appear washed out and less vibrant. Direct sunlight may affect touch operation.

### Ambient Heat

Keep the ambient temperature constant and below 40°C (104°F). Keep the display away from heating and/or air conditioning vents.

## Ventilation

If you are mounting the display in an enclosure, leave sufficient space on all sides between it and surrounding objects, as shown in Figure 3-1. This allows heat to disperse, maintaining the proper operating temperature.

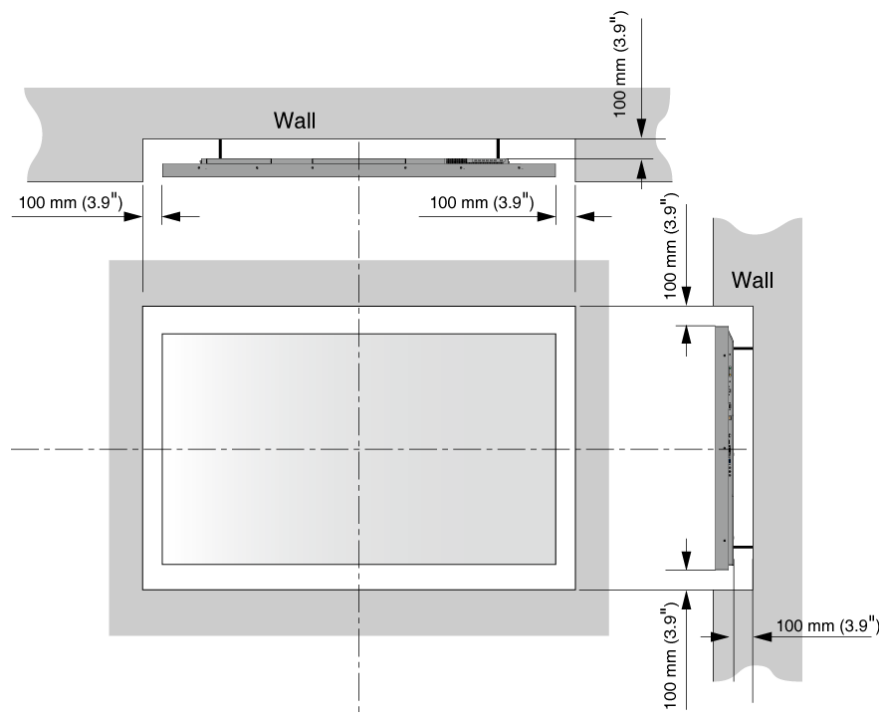

**Figure 3-1. Ventilation Requirements for Enclosure Mounting**

## Mounting the Display

You can mount the display on a wall.

If you do decide to wall-mount the display, ensure that the wall-mount bracket is installed according to the instructions included with it. The wall must be capable of supporting a redundant weight factor three (3) times the weight of the display, or be reinforced.

We recommend that this be done by a custom installation specialist.



### NOTE

To safely mount the display on a wall:

- Use only the approved wall-mount kit designed for the display.
- Make sure the tilt degree of the wall does not exceed 10 degrees.

## Connections to the Display

Proceed as follows to connect the display to your video sources, external controller(s) – if present – and AC power.

When connecting your equipment:


- Turn off all equipment before making any connections.
- Use the correct signal cables for each source.
- For best performance and to minimise cable clutter, use high-quality cables that are only as long as necessary to connect two devices. (Don't use a 7m cable when a 1.8m cable will suffice.)
- Ensure that the cables are securely connected. Tighten the thumbscrews on connectors that have them.

### Connecting a Control System or PC

#### RS232 Connection

Use a straight-through RS-232 cable with a 9-pin male connector to connect a PC or control/ automation system (if present) to the RS-232 port on the display; see **Figure 3-2**.

For more information about using this connection, refer to **External Control** on page 49.

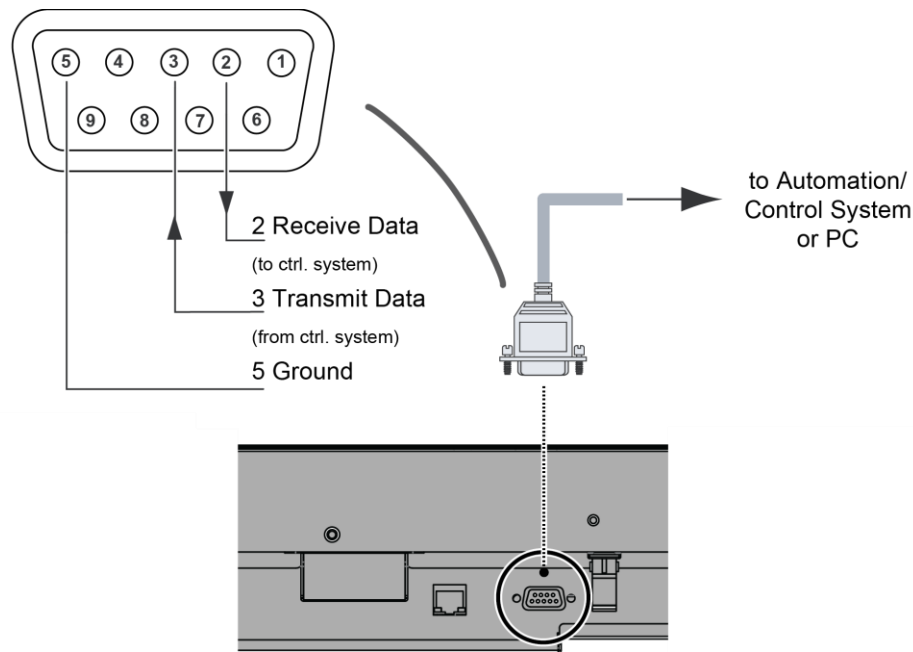

**Figure 3-2. RS232 Control System Connection**



#### NOTE

The RS232 connection may vary with different control system. If there is any problem regarding the connection, please contact our customer service for further assistance.

## Ethernet Connection

Use a standard Ethernet cable with an RJ-45 male connector to connect a PC or control/automation system (if present) to the Ethernet port on the display.

For more information about using this connection, refer to **External Control** on page 49.


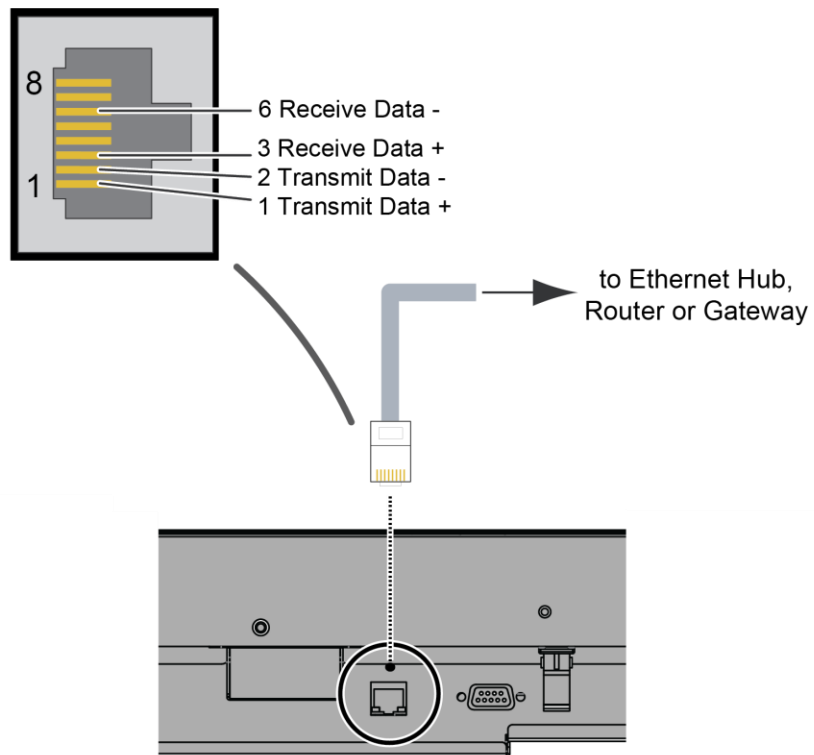


Figure 3-3. Ethernet Connection

## Connecting Source Components to the Display

Connect your video sources to the display as shown and described in the sections that follow.

**DisplayPort Source Connection:** See Figure 3-4.

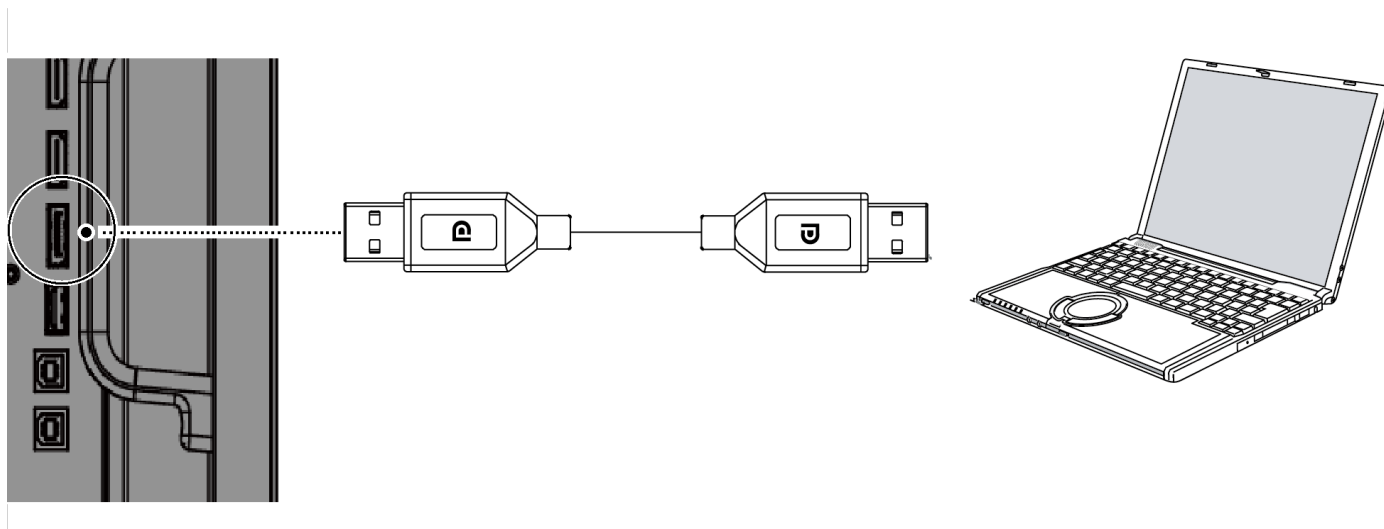

**Figure 3-4. DisplayPort Source Connection**

**HDMI Source Connections:** See Figure 3-5.



**TIP**


Use the HDMI inputs whenever possible. This ensures the highest video quality because the signal is carried in the digital domain throughout the entire signal path, from source component output into the display.



**NOTE**

This display supports the VESA Display Data Channel (DDC) standard. This standard provides "Plug and Play" capability; the display and a VESA DDC-compatible computer communicate their setting requirements, allowing for quick and easy setup.

For Plug and Play to work correctly, you must turn on the display before you turn on the connected computer.

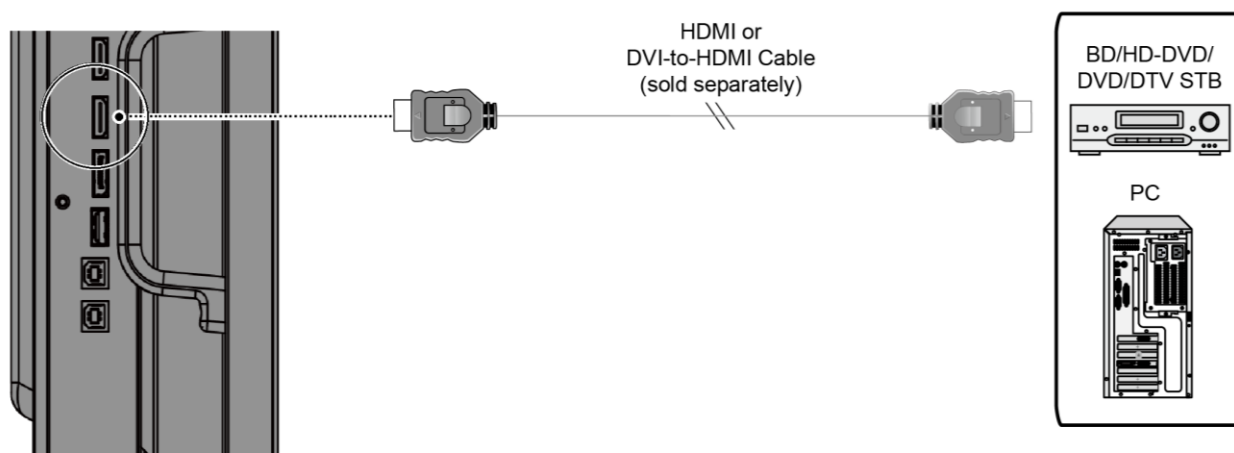


**Figure 3-5. HDMI Source Connections**

### VGA Source Connection:

Connect a personal computer or other RGB source to the VGA input as shown in Figure 3-6.



**NOTE** Refer to **Supported Timings** on page 59 for a list of compatible input signals.

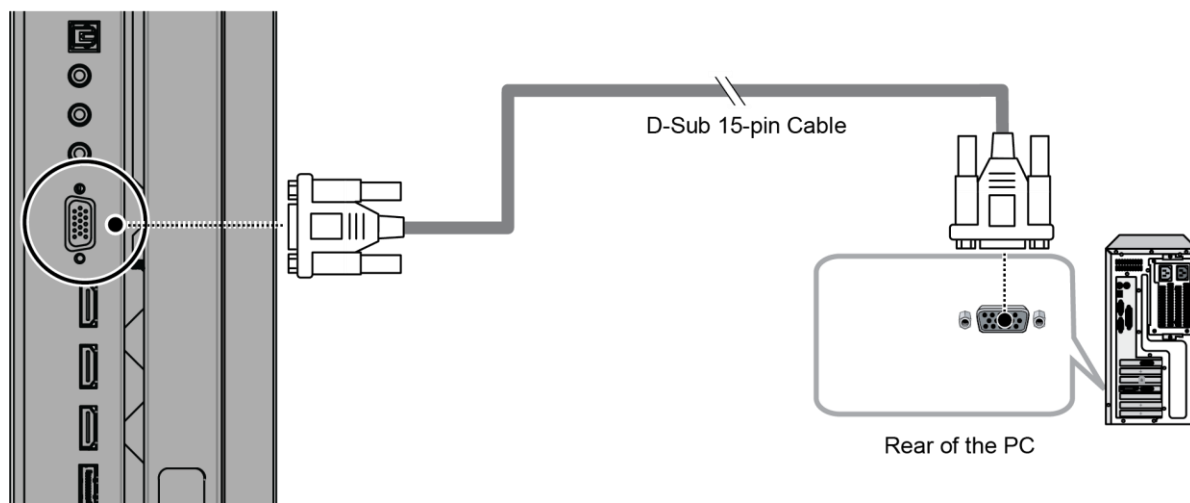


**Figure 3-6. VGA Source Connections**

## Turning on the Power

1. Turn on your source components.
2. Plug the female end of the supplied power cord into the AC receptacle on the side of the display (AC 100V ~ 240V). See Figure 2-2.
3. Connect the other end to your AC power source.
4. Turn on the main power switch at the side of the display (see Figure 2-1). The power indicator lights orange to indicate that the display is in "standby" mode.
5. Press the power button (  ) on the remote control to turn on the display or press the power button (  ) on the keypad.
6. After a brief warm-up period, the display will display an image.



**NOTE** If there's no input signal for a period of time, the display will automatically go into power saving (sleep) mode.

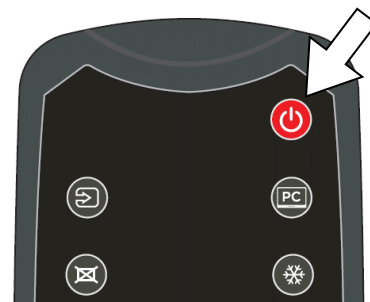

## Changing the OSD Language

The display OSD language is initially set to English, but can also display the menus in different languages.

To change the OSD language:


1. Press MENU.
2. Select Basic Settings from the Main Menu.
3. Select OSD Language from the Basic Settings Menu.
4. Press ◀ or ▶ to select the desired language and press OK. The change takes effect immediately.

## Enabling the Touch Screen

Before setting up your display to support touch screen capability, ensure that:

- Your computer is turned on and connected to the display using the provided USB cable. See Figure 3-7.
- The video output from the computer is connected to a video input on the display. See Figure 3-4, Figure 3-5 or Figure 3-6.
- The display is turned on.

Use the provided USB cable to connect the computer to the USB input on the display as shown in Figure 3-7.

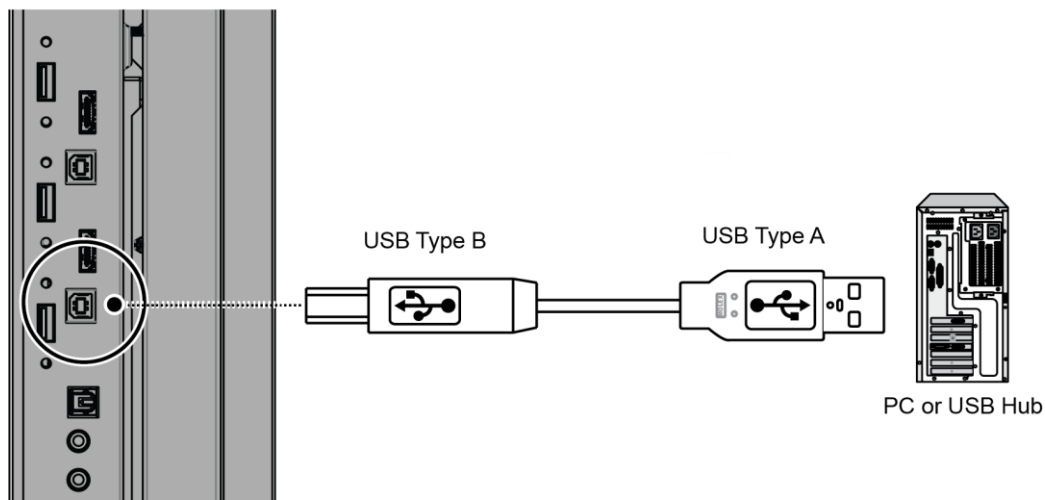

**Figure 3-7. Touch Screen Controller (USB) Connection**



### NOTE

If the touch screen is not working, please turn off your computer or the display and enabling the touch screen again following the steps above.

## 4. Operation

### Using the On-Screen Menus

To display the on-screen menus, press MENU on the remote control (Figure 2-3) or built-in keypad (Figure 2-1).

To select a sub-menu, use the ▲ and ▼ buttons to highlight it. Then, press ► to enter that sub-menu.

To select a menu item, use the ▲ and ▼ buttons to highlight it. Then, press ◀ or ▶ to adjust that setting and press OK.

The OSD menus are arranged hierarchically, as shown in Figure 4-1. The default values appear in bold type. Depending on the selected input source and signal characteristics, some menu options may not be available.

| Main Menu        | SubMenu             | Value                                                                           |
|------------------|---------------------|---------------------------------------------------------------------------------|
| Image Settings   | Scheme              | <b>User</b> , Vivid, Cinema, Game, Sport                                        |
|                  | Brightness          | 0, 1, 2, ..., <b>50</b> , ..., 100                                              |
|                  | Contrast            | 0, 1, 2, ..., <b>50</b> , ..., 100                                              |
|                  | Sharpness           | 0, 1, 2, ..., <b>50</b> , ..., 100                                              |
|                  | Saturation          | 0, 1, 2, ..., <b>50</b> , ..., 100                                              |
|                  | Hue                 | 0, 1, 2, ..., <b>50</b> , ..., 100                                              |
|                  | Backlight           | 0, 1, 2, ..., 50, ..., <b>80</b> , ..., 100                                     |
|                  | Colour Temp & Gamma | Color Temp: 5000K; 6500K; 7500K; <b>9300K</b> ; User<br>Gamma: <b>2.2</b> ; off |
|                  | HDMI RGB Range      | <b>Auto</b> ; 0-255; 16-235                                                     |
| Display Settings | Input Source        | VGA; DisplayPort; <b>HDMI1</b> ; HDMI2; OPS                                     |
|                  | Aspect Ratio        | <b>16:9</b> ; 4:3; Auto; Point To Point; Letterbox                              |
|                  | OverScan            | <b>0%</b> ~ 10%                                                                 |
|                  | Auto Scan           | On; <b>Off</b>                                                                  |
|                  | Source Renaming     | <b>Default</b>                                                                  |
|                  | Auto Adjust         | -                                                                               |
|                  | VGA Position        | 0 ~ 100 ( <b>50</b> )                                                           |
|                  | VGA Phase           | 0 ~ 255                                                                         |
|                  | VGA Clock           | 0 ~ 100 ( <b>50</b> )                                                           |
| Audio            | Volume              | 0 ~ 100 ( <b>50</b> )                                                           |
|                  | Treble              | -10 ~ 10 ( <b>0</b> )                                                           |
|                  | Bass                | -10 ~ 10 ( <b>0</b> )                                                           |
|                  | Balance             | -10 ~ 10 ( <b>0</b> )                                                           |
|                  | Internal Speaker    | <b>On</b> ; Off                                                                 |
|                  | Audio Source        | <b>Default</b>                                                                  |

| Main Menu      | SubMenu                 | Value                                                                                 |
|----------------|-------------------------|---------------------------------------------------------------------------------------|
| Basic Settings | Horizontal Pos.         | 0 ~ 100 ( <b>50</b> )                                                                 |
|                | Vertical Pos.           | 0 ~ 100 ( <b>50</b> )                                                                 |
|                | OSD Transparency        | 0 ~ 4 ( <b>0</b> )                                                                    |
|                | OSD Timeout             | 5 ~ 60 seconds ( <b>30</b> )                                                          |
|                | OSD Language            | <b>English</b> , French, Spanish, German, Dutch, Swedish, Portuguese, Danish, Italian |
|                | Splash Screen           | <b>On</b> ; Off                                                                       |
|                | Power LED               | <b>On</b> ; Off                                                                       |
|                | RTC & Schedule          | <b>User Mode</b> ; Workday Mode; Everyday Mode                                        |
| Adv. Settings  | Smart Light Control     | <b>Off</b> ; DCR;                                                                     |
|                | IRFM                    | On; <b>Off</b>                                                                        |
|                | Noise Reduction         | <b>Off</b> ; Low; Medium; High                                                        |
|                | Wake Up from Sleep      | <b>VGA Only</b> ; Digital, RS232, Ethernet; Never Sleep                               |
|                | EDID Switch             | 1080p; 4K2K@30; <b>4K2K@60</b>                                                        |
|                | Touch Input Mapping     | <b>Auto</b> ; USB Touch1; USB Touch 2; OPS                                            |
|                | Network Configuration   | -                                                                                     |
|                | Software Update (USB)   | Yes; No                                                                               |
|                | Restore Factory Default | Yes; No                                                                               |
| Information    | Source                  | Shows the Name of Input Source                                                        |
|                | Resolution              | Shows the Current Resolution                                                          |
|                | Model Name              | AVE-6520                                                                              |
|                | Firmware Version        | Shows the Firmware Version of the Monitor                                             |
|                | SubMCU Version          | Shows the Firmware Version of the Monitor                                             |
|                | Serial Number           | Shows the Serial Number of the Monitor                                                |




**NOTE** Default settings appear in bold type.

**Figure 4-1. OSD Menu Structure**

## Input Menu

This menu is used for making common image adjustments.

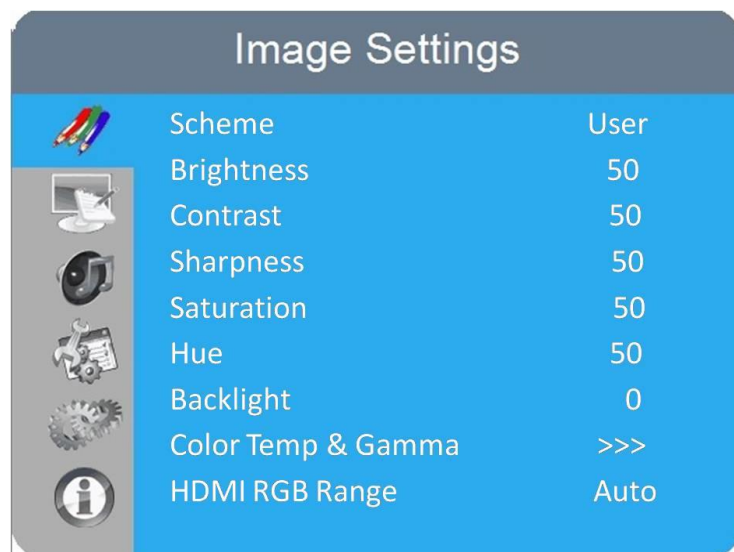

### Scheme

Press ◀ or ▶ to select one of the follows:

**Options:** User, Vivid, Cinema, Game, Sport; **Default:** User

### Brightness

Increase or decrease the brightness of picture.

Press ◀ or ▶ to select the desired level, and then press OK.

**Range:** 0~100; **Default:** 50

### Contrast

Increase or decrease the contrast of picture.

Press ◀ or ▶ to select the desired level, and then press OK.

**Range:** 0~100; **Default:** 50

### Saturation

Adjust the brilliance and brightness.

Press ◀ or ▶ to select the desired level, and then press OK.

**Range:** 0~100; **Default:** 50

Note: This function is not available when displaying PC or graphics sources

### Hue

Increase or decrease the green hue.

Press ◀ or ▶ to select the desired level, and then press OK.

**Range:** 0~100; **Default:** 50

Note: This function is not available when displaying PC or graphics sources

### Backlight

Increase or decrease the intensity of the LCD backlight.

Press ◀ or ▶ to select the desired level, and then press OK.

**Range:** 0~100; **Default:** 80

### Color Temp & Gamma

Set Color Temperature and Gamma. See next page.

### HDMI RGB Range

Select an RGB range for the HDMI input.

**Options:** Auto, 0-255, 16-235; **Default:** Auto

## Colour Temperature Settings



### Gamma

Select gamma curve

**Options:** Off, 2.2; **Default:** 2.2

### Color Temperature

Select a colour temperature or select User to make RGB adjustments.

**Options:** User, 5000K, 6500K, 7500K and 9300K; **Default:** 9300K

### Red Gain

Set Colour Temperature to "User Mode" in order to adjust this setting.

**Range:** 0~100; **Default:** 50

### Green Gain

Set Colour Temperature to "User Mode" in order to adjust this setting.

**Range:** 0~100; **Default:** 50

### Blue Gain

Set Colour Temperature to "User Mode" in order to adjust this setting.

**Range:** 0~100; **Default:** 50

### Red Offset

Set Colour Temperature to "User Mode" in order to adjust this setting.

**Range:** 0~100; **Default:** 50

### Green Offset

Set Colour Temperature to "User Mode" in order to adjust this setting.

**Range:** 0~100; **Default:** 50


### Blue Offset

Set Colour Temperature to "User Mode" in order to adjust this setting.

**Range:** 0~100; **Default:** 50

## Display Settings

This menu is used for making general display settings.

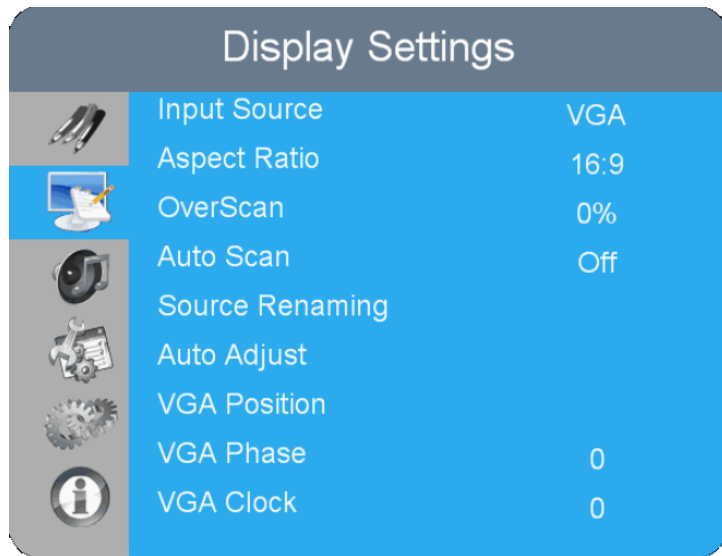

### Input Source

Select the main input source

**Options:** VGA; DisplayPort; HDMI 1; HDMI 2; OPS

**Default:** HDMI 1

### Aspect Ratio

Select aspect ratio

Press ◀ or ▶ to select the aspect ratio, and then press OK.

**Range:** 16:9; 4:3; Auto; Point To Point; Letterbox

**Default:** 16:9

### OverScan

Adjust the overscan of the image.

Press ◀ or ▶ to select the desired level, and then press OK.

**Range:** 0% ~ 10%; **Default:** 0%

### Auto Scan

Select whether the display will automatically scan for a main input source

**Options:** On, Off; **Default:** Off

### Source Renaming

**Default**

### Auto Adjust

Force the display to reacquire and lock to the input signal (VGA source only). This is useful when the signal quality is marginal.

Press ▶ to active auto adjust and then it will start adjusting the display.

Note: This feature does not continually reacquire the signal.

### VGA Position

Adjust the position of the image (VGA source only). Press ◀ or ▶ to select the desired level, and then press OK.

**Range:** 0~100; **Default:** 50

## VGA Phase

Adjust the phase of the displayed signal (VGA source only). Press ◀ or ▶ to select the desired level, and then press OK.

**Range:** 0~255


## VGA Clock

Adjust the clock of the displayed signal (VGA source only). Press ◀ or ▶ to select the desired level, and then press OK.

**Range:** 0~100; **Default:** 50

## Audio Menu

This menu is used for adjusting volume settings.

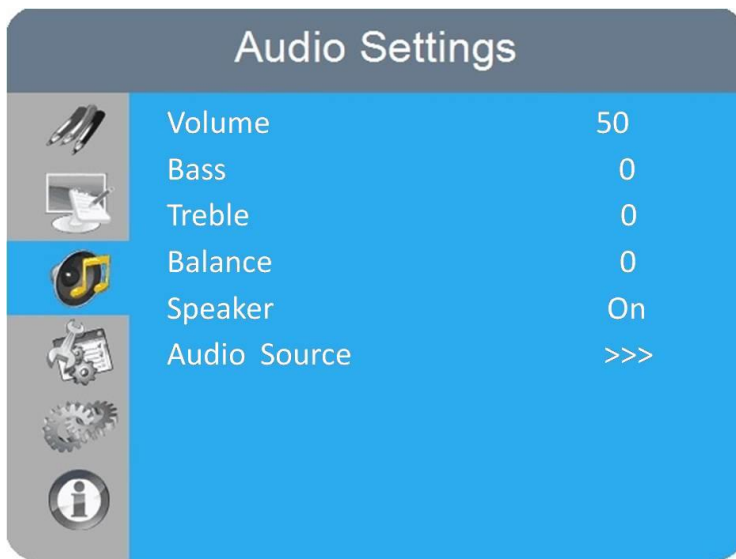

## Volume

Adjust the sound. Press ◀ or ▶ to select the desired level, and then press OK.

**Range:** 0~100; **Default:** 50

## Bass

Adjust the sound in low tones (bass). Press ◀ or ▶ to select the desired level, and then press OK.

**Range:** -10~10; **Default:** 0

## Treble

Adjust the sound in high tones (treble). Press ◀ or ▶ to select the desired level, and then press OK.

**Range:** -10~10; **Default:** 0

## Balance

Adjust the balance of the left and right speakers. Press ◀ or ▶ to select the desired level, and then press OK.

**Range:** -10~10; **Default:** 0

## Speaker

Turn the internal speaker on or off

**Default:** On


## Audio Source

Select the audio source for the Main input

**Default**

## Basic Settings

This menu is used to make basic settings.

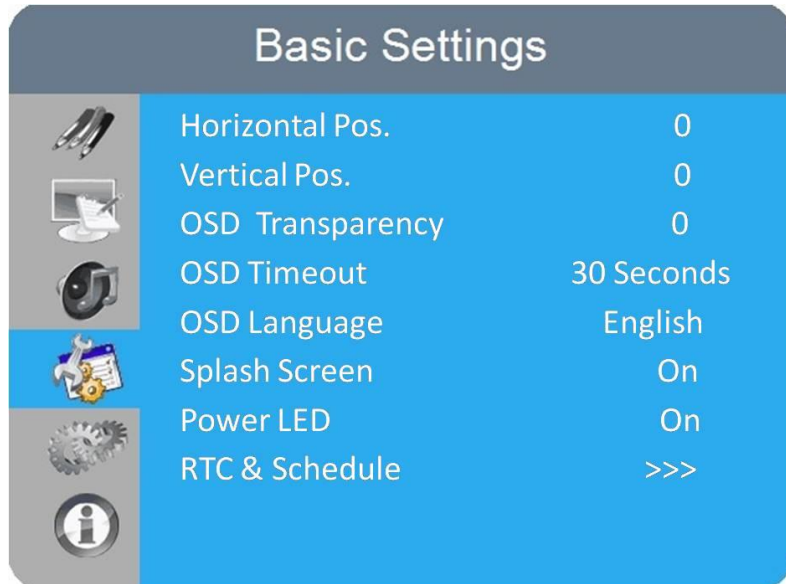

### Horizontal Pos.

Adjust the horizontal position of the OSD menu. Press ◀ or ▶ to select the desired level, and then press OK.

**Range:** 0~100; **Default:** 50

### Vertical Pos.

Adjust the vertical position of the OSD menu. Press ◀ or ▶ to select the desired level, and then press OK.

**Range:** 0~100; **Default:** 50

### OSD Transparency

Adjust the transparency of the OSD menu. Press ◀ or ▶ to select the desired level, and then press OK.

**Range:** 0~4; **Default:** 0

### OSD Timeout

Adjust the time in seconds before the OSD menu disappears. Press ◀ or ▶ to select the desired level, and then press OK.

**Options:** 5s~60s; **Default:** 30s

### OSD Language

Select the OSD language

**Options:** English, French, Spanish, German, Dutch, Swedish, Portuguese, Danish, Italian; **Default:** English

### Splash Screen

Select whether a splash screen appears when the monitor is powered up

**Options:** On, Off; **Default:** On

### Power LED

Enable or disable the status LED

**Options:** On, Off; **Default:** On

### RTC & Schedule


Set the internal clock of the display, and to power on and off the display at preset times if desired.

**Options:** User mode, Workday mode, Everyday mode

**Default:** User mode

## Advanced Settings

This menu is used to make advanced settings.

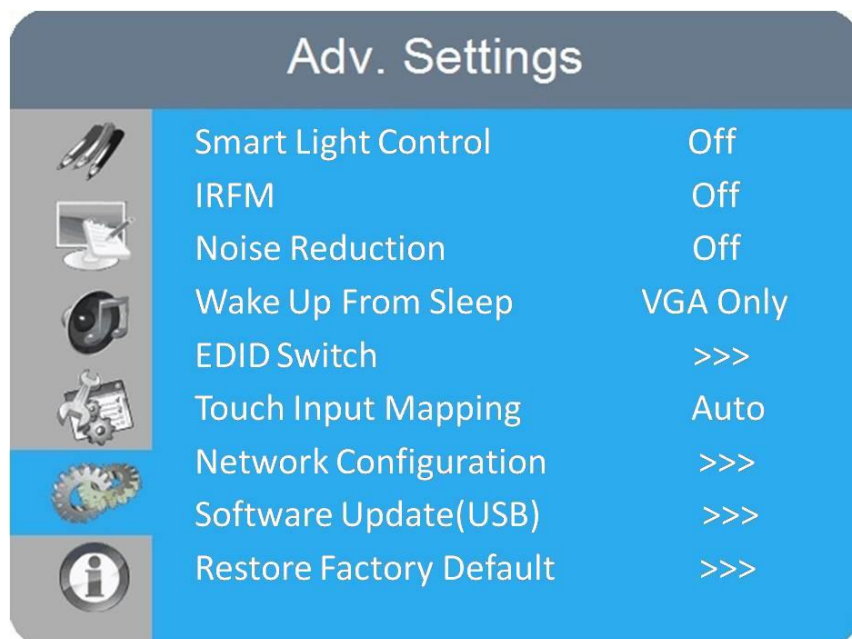

### Smart Light Control

Enable dynamic contrast (DCR) or ambient light sensor

**Options:** Off, DCR; **Default:** Off

### IRFM

Create slight frame motion to help avoid image retention

**Options:** On, Off; **Default:** Off

### Noise Reduction

Reduce random noise in the video content

**Options:** Off, Low, Medium, High; **Default:** Off

### Wake Up From Sleep

**Options:** VGA Only, Digital, RS232, Ethernet; Never Sleep

**Default:** VGA Only

### EDID Switch

Select EDID (Extended Display Identification Data) of the HDMI 1~2 and OPS inputs. **Options:** 1080p, 4K2K@30, 4K2K@60; **Default:** 4K2K@60

### Touch Input Mapping

Select one of the touch connections or choose auto detection.

**Options:** Auto, Touch USB 1, Touch USB 2, OPS; **Default:** Auto

### Network Configuration

Configures the network settings.

### Software Update(USB)

Plug in the USB flash drive and select to proceed with firmware update.

**Options:** No, Yes

### Factory Reset Default

Restore all settings to their default value.

**Options:** No, Yes

## Wake Up from Sleep


By default, the display will enter power saving (Sleep Mode) if no signal is received for 5 minutes. Normally, the RS-232, DisplayPort, and HDMI inputs are inactive in Sleep Mode, to save power.

To change the behavior of Sleep Mode, change the “**Wake up from Sleep**” setting in the “**Adv. Setup**” menu.

- **VGA Only** (default) – The RS-232, DisplayPort, and HDMI inputs are inactive when the display is in sleep mode. The display will wake up when it receives a signal at the VGA input.
- **Digital, RS232, Ethernet** – The RS-232, DisplayPort and HDMI inputs stay active when the display is in sleep mode. The display will wake up when it receives a signal at either of the VGA, DisplayPort, HDMI, DVI or RS-232 inputs, or via LAN connection.
- **Never Sleep** – The display would never enters sleep mode

## Network Configuration

By default, the display will enter power saving (Sleep Mode) if no signal is received for 5 minutes. Normally, the RS-232, DisplayPort, and HDMI inputs are inactive in Sleep Mode, to save power.

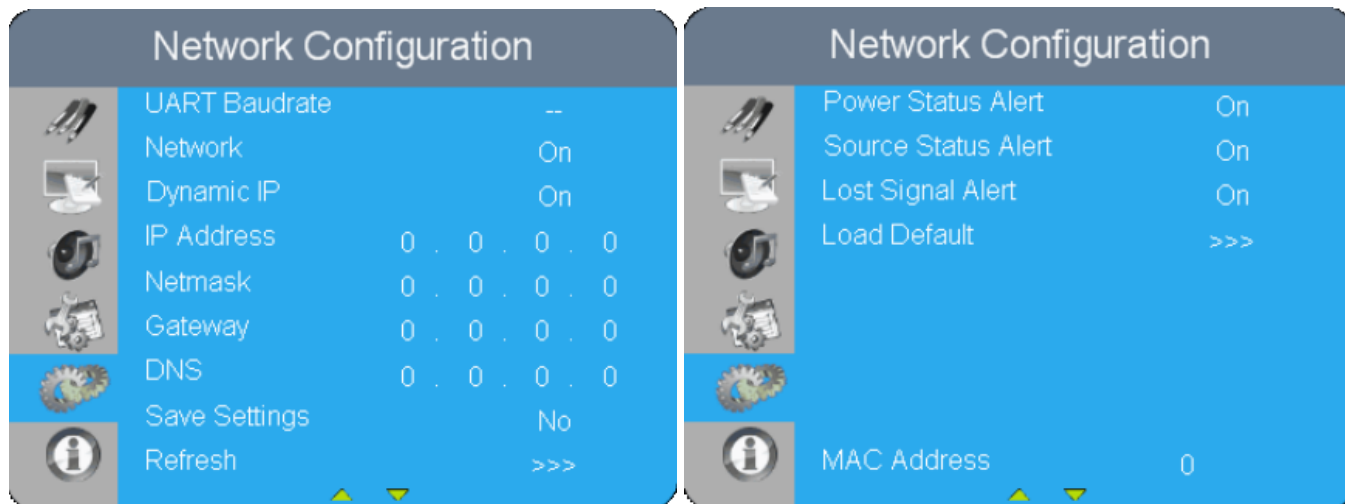

This menu configures the display's RS232 and Ethernet communication ports.

|                            |                                                                                                                        |
|----------------------------|------------------------------------------------------------------------------------------------------------------------|
| <b>UART Baudrate</b>       | Select the baud rate of the display's RS232 port<br><b>Options:</b> 115200, 38400, 19200, 9600; <b>Default:</b> 115200 |
| <b>Network</b>             | Enable the display's built-in Ethernet port<br><b>Options:</b> No, Yes; <b>Default:</b> No                             |
| <b>Dynamic IP</b>          | Enable Dynamic IP mode<br><b>Options:</b> Off, On; <b>Default:</b> Off                                                 |
| <b>IP Address</b>          | Set the static IP address of the display's Ethernet port<br><b>Default:</b> 0.0.0.0                                    |
| <b>Netmask</b>             | Set the subnet mask address.<br><b>Default:</b> 0.0.0.0                                                                |
| <b>Gateway</b>             | Set the Gateway mask address.<br><b>Default:</b> 0.0.0.0                                                               |
| <b>DNS</b>                 | Set the DNS mask address.<br><b>Default:</b> 0.0.0.0                                                                   |
| <b>Save Settings</b>       | Update the IP settings to net device.<br><b>Options:</b> No, Yes; <b>Default:</b> No                                   |
| <b>Refresh</b>             | Refresh dynamic IP information.                                                                                        |
| <b>Power Status Alert</b>  | Enable an automatic alert when the display is powered down<br><b>Options:</b> On, Off; <b>Default:</b> Off             |
| <b>Source Status Alert</b> |                                                                                                                        |

Enable an automatic alert when the source is changed

**Options:** On, Off; **Default:** Off

### Signal Lost Alert

Enable an automatic alert when the video signal is lost

**Options:** On, Off; **Default:** Off

### Load Default

Load default communication settings

**Options:** No, Yes

### Device MAC

Display the MAC address of the device.

## Information

This read-only menu provides information on the active source, the latest firmware version, and the serial number.

### Information



DisplayPort3840x2160@30Hz









AVE-6520V0.10  
SubVerV01/1028



SN111111111111

# 5. Maintenance and Troubleshooting

## Maintenance

The AVOCOR Series LED Displays does not require any routine maintenance other than occasional cleaning with a non-abrasive cloth. There are no user-serviceable or replaceable parts. Unless you are a qualified, factory-trained technician, do not attempt to repair or replace any system component yourself. You will void the product warranty if you do so.

## Troubleshooting

Table 5-1 provides some general guidelines for troubleshooting problems you may encounter with the AVOCOR Series LED Display. If the suggested solutions fail to resolve the problem or if you encounter an issue not described here, please contact your dealer.

**Table 5-1. Troubleshooting Chart**

| Symptom                                                             | Possible Cause(s)                                                                                                                                      | Solution                                                                                                                                                                    |
|---------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>The display does not turn on.</b>                                | The display is not plugged in or the AC outlet is not active.<br><br>The main power switch is off.<br><br>The remote control batteries have run out.   | Ensure that the display is plugged in and that the AC outlet is active.<br><br>Set the main power switch (see Figure 2-1) to the on position.<br><br>Replace the batteries. |
| <b>The display is on and menus appear, but there is no picture.</b> | Incorrect source selection.<br><br>Source component is not turned on.<br><br>Source component is connected incorrectly or not at all.                  | Select the correct source.<br><br>Turn on the source component.<br><br>Check connections from the source component to the display.                                          |
| <b>The remote control does not work.</b>                            | The remote control batteries have run out.<br><br>The buttons are locked.                                                                              | Replace the batteries.<br><br>Unlock the buttons by pressing <b>OK, OK, EXIT, EXIT, OK and EXIT</b> , in sequence.                                                          |
| <b>Image geometry is incorrect.</b>                                 | Incorrect aspect ratio selection.                                                                                                                      | Select a different aspect ratio.                                                                                                                                            |
| <b>The display is jittery or unstable.</b>                          | Poor-quality or improperly connected source.<br><br>The horizontal or vertical scan frequency of the input signal may be out of range for the display. | Ensure that the source is properly connected and of adequate quality for detection.<br><br>Correct at the source.                                                           |

Table 5-1. Troubleshooting Chart (continued)

| Symptom                                                                                | Possible Cause(s)                                                                                   | Solution                                                                                              |
|----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|
| <b>Image is too bright and / or lacks definition in the bright areas of the image.</b> | Contrast is set too high.                                                                           | Decrease the contrast setting.                                                                        |
| <b>Image appears “washed out” and / or dark areas appear too bright.</b>               | Brightness is set too high.                                                                         | Decrease the brightness setting.                                                                      |
| <b>Image is too dark.</b>                                                              | Brightness and / or Backlight are set too low.                                                      | Increase the brightness and / or backlight settings.                                                  |
| <b>Images from an HDMI source do not display.</b>                                      | The resolution and frequency of the video card in the computer are not compatible with the display. | Select a compatible resolution and vertical frequency (refer to <b>Supported Timings</b> on page 59). |
|                                                                                        | HDMI cable from source to display is either defective or too long.                                  | Try a known-good and / or shorter HDMI cable.                                                         |
| <b>Computer images do not display correctly.</b>                                       | The resolution and frequency of the video card in the computer are not compatible with the display  | Select a compatible resolution and vertical frequency (refer to <b>Supported Timings</b> on page 59). |
|                                                                                        | Clock and Phase settings need adjustment.                                                           | Adjust Clocks and Phase settings (refer to <b>Setup Settings</b> page 39).                            |
| <b>Touch screen doesn't work.</b>                                                      | Multi-touch controller host computer is not connected correctly.                                    | See Figure 3-7.                                                                                       |
|                                                                                        | Host computer hardware or OS incompatibility.                                                       | Refer to <b>Enabling the Touch Screen</b> on page 34.                                                 |

Should you require assistance with a suspected hardware fault, please contact the support line below. You will require your unit serial number. The operator will attempt to diagnose any fault and will take action as appropriate.



## Warranty Support

UK & EMEA. Tel +44 (0) 1276 804 654 - [service@avocor.co.uk](mailto:service@avocor.co.uk)

US & ROW. Tel. 858-268-7999 - [service@avocor.com](mailto:service@avocor.com)

## 6. External Control

In addition to using the display keypad or remote control unit, you can control the display using a serial (RS232) link to send Hexadecimal commands and receive responses to those commands. **(ASCII is not accepted/used)**

You also use discrete infrared (IR) control codes to program a third-party remote control unit. For more information, refer to Using Discrete IR Codes on page 56.

### Serial Communications

The display uses a simple text-based control protocol to take requests from control devices and to provide responses to such devices. This section describes how to send control messages over a serial link between the display and an automation/control system or a PC running a terminal emulation program such as Windows® HyperTerminal or Tera Term.

#### RS232 Connection and Port Configuration

Connect your control system or PC to the RS232 input of the display as shown in Figure 3-2.

Configure the RS232 controller or PC serial port as follows: no parity, 8 data bits, 1 stop bit and no flow control. Set the baud rate to 115200, to match that of the display RS232 port.

#### Command and Response Format

Commands sent from an automation/control system or PC to the display must have the following format:

[STX] [IDT] [TYPE] [CMD] ([VALUE] or [REPLY]) [ETX]

Where:

- [STX] indicates the start of the command data (always 07).
- [IDT] is the display ID (always 01).
- [TYPE] is the command type:
  - 00 = return to host (response from the LCD panel)
  - 01 = read / action
  - 02 = write
- [VALUE] is the parameter setting for the command.
- [REPLY] is the parameter setting for the command, acknowledged by the display in its response to a command.
- [ETX] indicates the end of the command data (always 08).

## Command and Response Examples

Here are some examples of Hexadecimal serial commands and their responses:

**Table 6-1. Serial Command/ Response Examples**

| Description                                | Command sent to LCD Panel | Response Received from LCD Panel                                                |
|--------------------------------------------|---------------------------|---------------------------------------------------------------------------------|
| Turn LCD panel power off.                  | 07 01 02 50 4F 57 00 08   | 07 01 00 50 4F 57 00 08                                                         |
| Turn LCD panel power on.                   | 07 01 02 50 4F 57 01 08   | 07 01 00 50 4F 57 01 08                                                         |
| Request LCD panel power status.            | 07 01 01 50 4F 57 08      | 07 01 00 50 4F 57 XX 08<br>(XX = 0 when off or 1 when on)                       |
| Set the LCD panel contrast to 30 (1E hex). | 07 01 02 43 4F 4E 1E 08   | 07 01 00 43 4F 4E 1E 08                                                         |
| Reset the LCD panel display settings.      | 07 01 02 41 4C 4C 00 08   | 07 01 00 41 4C 4C 00 08                                                         |
| Request LCD panel serial number.           | 07 01 01 53 45 52 08      | 07 01 00 53 45 52 S(0)...S(12) 08<br>S(0) ...S(12) = the serial number in ASCII |
| Request LCD panel firmware version.        | 07 01 01 47 56 45 08      | 07 01 00 47 56 45 S(0)...S(5) 08<br>S(0)...S(5) = the firmware version in ASCII |

## Serial Command List

Table 6-2 lists all supported commands.

**Table 6-2. Serial Commands**

| Main Item                      | Control Item       | Type | CMD (HEX)       | Value (HEX) | Reply (HEX) | Content                  | CMD (ASCII) |
|--------------------------------|--------------------|------|-----------------|-------------|-------------|--------------------------|-------------|
| Power Control and Input Source | Power Control      | W/R  | 50 4F 57 (Note) | 0           | 0           | Off (soft power)         | POW         |
|                                |                    |      |                 | 1           | 1           | On (soft power)          |             |
|                                | IPC Control        | W/R  | 49 50 43        | 0           | 0           | Off                      | IPC         |
|                                |                    |      |                 | 1           | 1           | On                       |             |
|                                | Input Source       | W/R  | 4D 49 4E        | 0           | 0           | VGA                      | MIN         |
|                                |                    |      |                 | 9           | 9           | HDMI 1                   |             |
|                                |                    |      |                 | 0A          | 0A          | HDMI 2                   |             |
|                                |                    |      |                 | 0D          | 0D          | DisplayPort              |             |
|                                |                    |      |                 | 0E          | 0E          | IPC/OPS                  |             |
|                                |                    |      |                 |             |             |                          |             |
| Display Adjustment             | Display Adjustment | W/R  | 42 52 49        | 00~64       | 00~64       | Back Light Brightness    | BRI         |
|                                |                    | W/R  | 42 52 4C        | 00~64       | 00~64       | Digital Brightness Level | BRL         |
|                                |                    | W/R  | 42 4C 43        | 0           | 0           | Off (Back Light)         | BLC         |
|                                |                    |      |                 | 1           | 1           | On (Back Light)          |             |
|                                |                    | W/R  | 43 4F 4E        | 00~64       | 00~64       | Contrast                 | CON         |
|                                |                    | W/R  | 48 55 45        | 00~64       | 00~64       | Hue                      | HUE         |
|                                |                    | W/R  | 53 41 54        | 00~64       | 00~64       | Saturation               | SAT         |
|                                |                    | W/R  | 4E 4F 52        | 0           | 0           | Noise Reduction: Off     | NOR         |
|                                |                    |      |                 | 1           | 1           | Noise Reduction: Low     |             |
|                                |                    |      |                 | 2           | 2           | Noise Reduction: Medium  |             |
|                                |                    |      |                 | 3           | 3           | Noise Reduction: High    |             |
|                                |                    | W/R  | 55 53 52        | 00~64       | 00~64       | Red Gain (mapping 0~100) | USR         |

| Main Item          | Control Item        | Type | CMD (HEX) | Value (HEX) | Reply (HEX) | Content                                       | CMD (ASCII) |
|--------------------|---------------------|------|-----------|-------------|-------------|-----------------------------------------------|-------------|
| Display Adjustment | Display Adjustment  | W/R  | 55 53 47  | 00~64       | 00~64       | Green Gain (mapping 0~100)                    | USG         |
|                    |                     | W/R  | 55 53 42  | 00~64       | 00~64       | Blue Gain (mapping 0~100)                     | USB         |
|                    |                     | W/R  | 55 4F 52  | 00~64       | 00~64       | Red Offset (mapping 0~100)                    | UOR         |
|                    |                     | W/R  | 55 4F 47  | 00~64       | 00~64       | Green Offset (mapping 0~100)                  | UOG         |
|                    |                     | W/R  | 55 4F 42  | 00~64       | 00~64       | Blue Offset (mapping 0~100)                   | UOB         |
|                    |                     | W/R  | 43 4F 54  | 0           | 0           | User                                          | COT         |
|                    |                     |      |           | 1           | 1           | 6500K                                         |             |
|                    |                     |      |           | 2           | 2           | 9300K                                         |             |
|                    |                     |      |           | 6           | 6           | 5000K                                         |             |
|                    |                     |      |           | 7           | 7           | 7500K                                         |             |
|                    |                     | W/R  | 47 41 43  | 0           | 0           | Gamma Off                                     | GAC         |
|                    |                     |      |           | 1           | 1           | Gamma 2.2                                     |             |
|                    | VGA Adjustment      | W/R  | 50 48 41  | 00~FF       | 00~FF       | Phase                                         | PHA         |
|                    |                     | W/R  | 43 4C 4F  | 00~64       | 00~64       | Clock                                         | CLO         |
|                    |                     | R/W  | 48 4F 52  | 00~64       | 00~64       | Horizontal Position                           | HOR         |
|                    |                     | R/W  | 56 45 52  | 00~64       | 00~64       | Vertical Position                             | VER         |
|                    |                     | W    | 41 44 4A  | 0           | 0           | Auto Adjust                                   | ADJ         |
|                    | Sharpness           | W/R  | 53 48 41  | 00~64       | 00~64       | Sharpness                                     | SHA         |
| Other Control      | Scaling             | W/R  | 41 53 50  | 0           | 0           | Main Window Aspect Ratio Native(PointToPoint) | ASP         |
|                    |                     |      |           | 1           | 1           | Full Screen (16:9)                            |             |
|                    |                     |      |           | 2           | 2           | Pillarbox (4:3)                               |             |
|                    |                     |      |           | 3           | 3           | Letterbox                                     |             |
|                    |                     |      |           | 4           | 4           | Auto                                          |             |
|                    |                     | W/R  | 5A 4F 4D  | 00~0A       | 00~0A       | Adjust overscan ratio                         | ZOM         |
|                    | Baudrate Adjustment | W/R  | 42 52 41  | 0           | 0           | 115200                                        | BRA         |
|                    |                     |      |           | 1           | 1           | 38400                                         |             |
|                    |                     |      |           | 2           | 2           | 19200                                         |             |
|                    |                     |      |           | 3           | 3           | 9600                                          |             |
|                    | Other Control       | W    | 52 43 55  | 0           | 0           | MENU Key                                      | RCU         |
|                    |                     |      |           | 1           | 1           | INFO Key                                      |             |
|                    |                     |      |           | 2           | 2           | UP Key                                        |             |
|                    |                     |      |           | 3           | 3           | DOWN Key                                      |             |
|                    |                     |      |           | 4           | 4           | LEFT Key                                      |             |
|                    |                     |      |           | 5           | 5           | RIGHT Key                                     |             |
|                    |                     |      |           | 6           | 6           | OK Key                                        |             |
|                    |                     |      |           | 7           | 7           | EXIT Key                                      |             |
|                    |                     |      |           | 8           | 8           | VGA Key                                       |             |
|                    |                     |      |           | 0A          | 0A          | HDMI1 Key                                     |             |
|                    |                     |      |           | 0B          | 0B          | HDMI2 Key                                     |             |
|                    |                     |      |           | 17          | 17          | SCALING Key                                   |             |
|                    |                     |      |           | 18          | 18          | FREEZE Key                                    |             |
|                    |                     |      |           | 19          | 19          | MUTE Key                                      |             |
|                    |                     |      |           | 1A          | 1A          | BRIGHT Key                                    |             |
|                    |                     |      |           | 1B          | 1B          | CONTRAST Key                                  |             |
|                    |                     |      |           | 1C          | 1C          | AUTO Key                                      |             |
|                    |                     |      |           | 1D          | 1D          | VOLUME+ Key                                   |             |
|                    |                     |      |           | 1E          | 1E          | VOLUME- Key                                   |             |

| Main Item     | Control Item            | Type | CMD (HEX) | Value (HEX) | Reply (HEX)   | Content                                  | CMD (ASCII) |
|---------------|-------------------------|------|-----------|-------------|---------------|------------------------------------------|-------------|
|               |                         | W    | 52 43 55  | 21          | 21            | OPS Key                                  | RCU         |
|               |                         | W    | 41 4C 4C  | 0           | 0             | Reset all                                | ALL         |
|               |                         |      |           | 1           | 1             | Reset all but communication (RS232, LAN) |             |
|               |                         | W/R  | 4B 4C 43  | 0           | 0             | Un-lock keys                             | KLC         |
|               |                         |      |           | 1           | 1             | Lock keys                                |             |
|               |                         | R    | 53 45 52  |             | 13 bytes      | Read Serial Number                       | SER         |
|               |                         | R    | 4D 4E 41  |             | 13 bytes      | Read Model Name                          | MNA         |
|               |                         | R    | 47 56 45  |             | 6 bytes       | Read Firmware Version                    | GVE         |
|               |                         | R    | 52 54 56  |             | Current value | Read RS232 table Version                 | RTV         |
|               |                         | W    | 47 56 53  | 0           | [00]+5 byte   | Querying main scaler version             | GVS         |
|               |                         |      |           | 1           | [00]+5 byte   | Querying sub mcu version                 |             |
|               |                         |      |           | 2           | [00]+5 byte   | Querying network module version          |             |
|               | Audio                   | W/R  | 56 4F 4C  | 00~64       | 00~64         | volume                                   | VOL         |
|               |                         | W/R  | 42 41 53  | 00~14       | 00~14         | Bass (-10~10)                            | BAS         |
|               |                         | W/R  | 54 52 45  | 00~14       | 00~14         | Treble (-10~10)                          | TRE         |
|               |                         | W/R  | 42 41 4C  | 00~14       | 00~14         | Bass (-10~10)                            | BAL         |
|               |                         | W/R  | 49 4E 53  | 0           | 0             | Internal Speaker Off                     | INS         |
|               |                         |      |           | 1           | 1             | Internal Speaker On                      |             |
|               |                         | W/R  | 4D 55 54  | 0           | 0             | Mute Off                                 | MUT         |
|               |                         |      |           | 1           | 1             | Mute On                                  |             |
|               | Scheme selection        | W/R  | 53 43 4D  | 0           | 0             | User                                     | SCM         |
|               |                         |      |           | 1           | 1             | Sport                                    |             |
|               |                         |      |           | 2           | 2             | Game                                     |             |
|               |                         |      |           | 3           | 3             | Cinema                                   |             |
|               |                         |      |           | 4           | 4             | Vivid                                    |             |
| Other Control | EcoMode WakeUpFromSleep | W/R  | 57 46 53  | 0           | 0             | Set VGA_ONLY                             | WFS         |
|               |                         |      |           | 1           | 1             | Set DIGITAL, RS232, Ethernet             |             |
|               |                         |      |           | 2           | 2             | Set Never_Sleep                          |             |
|               | RTC                     | W/R  | 52 54 59  | 00~63       | 00~63         | Set Real time Year                       | RTY         |
|               |                         | W/R  | 52 54 4D  | 01~0C       | 01~0C         | Set Real time Month                      | RTM         |
|               |                         | W/R  | 52 54 44  | 01~1F       | 01~1F         | Set Real time Day                        | RTD         |
|               |                         | W/R  | 52 54 48  | 00~17       | 00~17         | Set Real time Hour                       | RTH         |
|               |                         | W/R  | 52 54 4E  | 00~3B       | 00~3B         | Set Real time Minute                     | RTN         |
|               |                         | W/R  | 54 4D 53  | 0           | 0             | Same Settings On All (Everyday)          | TMS         |
|               |                         |      |           | 1           | 1             | Same Settings On Work Days (Workday)     |             |
|               |                         |      |           | 2           | 2             | User                                     |             |
|               |                         | W/R  | 41 45 4E  | 1           | 1             | Sunday Alarm Enable                      | AEN         |
|               |                         |      |           | 2           | 2             | Monday Alarm Enable                      |             |
|               |                         |      |           | 4           | 4             | Tuesday Alarm Enable                     |             |

| Main Item     | Control Item | Type | CMD (HEX) | Value (HEX) | Reply (HEX) | Content                 | CMD (ASCII) |
|---------------|--------------|------|-----------|-------------|-------------|-------------------------|-------------|
| Other Control | RTC          | W/R  | 41 45 4E  | 8           | 8           | Wednesday Alarm Enable  | AEN         |
|               |              |      |           | 10          | 10          | Thursday Alarm Enable   |             |
|               |              |      |           | 20          | 20          | Friday Alarm Enable     |             |
|               |              |      |           | 40          | 40          | Saturday Alarm Enable   |             |
|               |              | W/R  | 41 45 46  | 1           | 1           | Sunday Alarm Disable    | AEF         |
|               |              |      |           | 2           | 2           | Monday Alarm Disable    |             |
|               |              |      |           | 4           | 4           | Tuesday Alarm Disable   |             |
|               |              |      |           | 8           | 8           | Wednesday Alarm Disable |             |
|               |              |      |           | 10          | 10          | Thursday Alarm Disable  |             |
|               |              |      |           | 20          | 20          | Friday Alarm Disable    |             |
|               |              |      |           | 40          | 40          | Saturday Alarm Disable  |             |
|               |              | W/R  | 4E 4E 48  | 00~17       | 00~17       | Monday On Hour          | NNH         |
|               |              | W/R  | 4E 4E 4D  | 00~3B       | 00~3B       | Monday On Minute        | NNM         |
|               |              | W/R  | 4E 46 48  | 00~17       | 00~17       | Monday Off Hour         | NFH         |
|               |              | W/R  | 4E 46 4D  | 00~3B       | 00~3B       | Monday Off Minute       | NFM         |
|               |              | W/R  | 45 4E 48  | 00~17       | 00~17       | Tuesday On Hour         | ENH         |
|               |              | W/R  | 45 4E 4D  | 00~3B       | 00~3B       | Tuesday On Minute       | ENM         |
|               |              | W/R  | 45 46 48  | 00~17       | 00~17       | Tuesday Off Hour        | EFH         |
|               |              | W/R  | 45 46 4D  | 00~3B       | 00~3B       | Tuesday Off Minute      | EFM         |
|               |              | W/R  | 44 4E 48  | 00~17       | 00~17       | Wednesday On Hour       | DNH         |
|               |              | W/R  | 44 4E 4D  | 00~3B       | 00~3B       | Wednesday On Minute     | DNM         |
|               |              | W/R  | 44 46 48  | 00~17       | 00~17       | Wednesday Off Hour      | DFH         |
|               |              | W/R  | 44 46 4D  | 00~3B       | 00~3B       | Wednesday Off Minute    | DFM         |
|               |              | W/R  | 55 4E 48  | 00~17       | 00~17       | Thursday On Hour        | UNH         |
|               |              | W/R  | 55 4E 4D  | 00~3B       | 00~3B       | Thursday On Minute      | UNM         |
|               |              | W/R  | 55 46 48  | 00~17       | 00~17       | Thursday Off Hour       | UFH         |
|               |              | W/R  | 55 46 4D  | 00~3B       | 00~3B       | Thursday Off Minute     | UFM         |
|               |              | W/R  | 49 4E 48  | 00~17       | 00~17       | Friday On Hour          | INH         |
|               |              | W/R  | 49 4E 4D  | 00~3B       | 00~3B       | Friday On Minute        | INM         |
|               |              | W/R  | 49 46 48  | 00~17       | 00~17       | Friday Off Hour         | IFH         |
|               |              | W/R  | 49 46 4D  | 00~3B       | 00~3B       | Friday Off Minute       | IFM         |
|               |              | W/R  | 54 4E 48  | 00~17       | 00~17       | Saturday On Hour        | TNH         |
|               |              | W/R  | 54 4E 4D  | 00~3B       | 00~3B       | Saturday On Minute      | TNM         |
|               |              | W/R  | 54 46 48  | 00~17       | 00~17       | Saturday Off Hour       | TFH         |
|               |              | W/R  | 54 46 4D  | 00~3B       | 00~3B       | Saturday Off Minute     | TFM         |
|               |              | W/R  | 53 4E 48  | 00~17       | 00~17       | Sunday On Hour          | SNH         |
|               |              | W/R  | 53 4E 4D  | 00~3B       | 00~3B       | Sunday On Minute        | SNM         |
|               |              | W/R  | 53 46 48  | 00~17       | 00~17       | Sunday Off Hour         | SFH         |
|               |              | W/R  | 53 46 4D  | 00~3B       | 00~3B       | Sunday Off Minute       | SFM         |
|               | Auto Scan    | W/R  | 41 54 53  | 0           | 0           | Off                     | ATS         |
|               |              |      |           | 1           | 1           | On                      |             |
|               | IRFM         | W/R  | 49 52 46  | 0           | 0           | Off                     | IRF         |
|               |              |      |           | 1           | 1           | On                      |             |

| Main Item      | Control Item         | Type | CMD (HEX) | Value (HEX) | Reply (HEX) | Content                                                        | CMD (ASCII) |
|----------------|----------------------|------|-----------|-------------|-------------|----------------------------------------------------------------|-------------|
| Other Control  | Smart Light Control  | W/R  | 53 4C 43  | 0           | 0           | Off                                                            | SLC         |
|                |                      |      |           | 1           | 1           | DCR                                                            |             |
|                | Power LED            | W/R  | 4C 45 44  | 0           | 0           | Off                                                            | LED         |
|                |                      |      |           | 1           | 1           | On                                                             |             |
|                | HDMI EDID            | W/R  | 45 44 48  | 0           | 0           | 4Kx2K                                                          | EDH         |
|                |                      |      |           | 1           | 1           | 1080P                                                          |             |
|                | DisplayPort EDID     | W/R  | 45 44 50  | 0           | 0           | 4Kx2K                                                          | EDP         |
|                |                      |      |           | 1           | 1           | 1080P                                                          |             |
|                | HDMI RGB Color Range | W/R  | 48 43 52  | 0           | 0           | Auto Detect                                                    | HCR         |
|                |                      |      |           | 1           | 1           | Full Range                                                     |             |
|                |                      |      |           | 2           | 2           | Limited Range                                                  |             |
|                | Touch Control        | W/R  | 54 4F 43  | 0           | 0           | Auto (Read Only)                                               | TOC         |
|                |                      |      |           | 1           | 1           | OPS                                                            |             |
|                |                      |      |           | 2           | 2           | External Touch 1                                               |             |
|                |                      |      |           | 3           | 3           | External Touch 2                                               |             |
| OSD Control    | Transparency         | W/R  | 4F 53 54  | 00~04       | 00~04       | OSD Transparency                                               | OST         |
|                | H Position           | W/R  | 4F 53 48  | 00~64       | 00~64       | OSD H Position                                                 | OSH         |
|                | V Position           | W/R  | 4F 53 56  | 00~64       | 00~64       | OSD V Position                                                 | OSV         |
|                | OSD Language         | W/R  | 4F 53 4C  | 0           | 0           | English                                                        | OSL         |
|                |                      |      |           | 1           | 1           | French                                                         |             |
|                |                      |      |           | 2           | 2           | German                                                         |             |
|                |                      |      |           | 3           | 3           | Dutch                                                          |             |
|                |                      |      |           | 08          | 08          | Danish                                                         |             |
|                |                      |      |           | 0D          | 0D          | Italian                                                        |             |
|                |                      |      |           | 0E          | 0E          | Swedish                                                        |             |
|                |                      |      |           | 0F          | 0F          | Portuguese                                                     |             |
|                |                      |      |           | 10          | 10          | Spanish                                                        |             |
|                | OSD Timeout          | W/R  | 4F 53 4F  | 05~3C       | 05~3C       | OSD Timeout (5, 10, 20, 30, 60 sec)                            | OSO         |
| Ethernet Setup | Network Enable       | W/R  | 4E 57 45  | 0           | 0           | No                                                             | NWE         |
|                |                      |      |           | 1           | 1           | Yes                                                            |             |
|                | Dynamic IP           | W/R  | 44 49 50  | 0           | 0           | Disable                                                        | DIP         |
|                |                      |      |           | 1           | 1           | Enable                                                         |             |
|                | Default              | W    | 4C 44 53  | 0           | 0           | Load network default settings (It will take about 15 seconds.) | LDS         |
|                | E-Mail Alert         | W/R  | 50 53 41  | 0           | 0           | Off (Power Status Alert)                                       | PSA         |
|                |                      |      |           | 1           | 1           | On (Power Status Alert)                                        |             |
|                |                      | W/R  | 53 53 41  | 0           | 0           | Off (Source Status Alert)                                      | SSA         |
|                |                      |      |           | 1           | 1           | On (Source Status Alert)                                       |             |
|                |                      | W/R  | 53 4C 41  | 0           | 0           | Off (Signal Lost Alert)                                        | SLA         |
|                |                      |      |           | 1           | 1           | On (Signal Lost Alert)                                         |             |

| Main Item      | Control Item       | Type | CMD (HEX) | Value (HEX) | Reply (HEX) | Content               | CMD (ASCII) |
|----------------|--------------------|------|-----------|-------------|-------------|-----------------------|-------------|
| Ethernet Setup | Static IP Settings | W/R  | 49 50 31  | 00~FF       | 00~FF       | Static IP Address 1   | IP1         |
|                |                    | W/R  | 49 50 32  | 00~FF       | 00~FF       | Static IP Address 2   | IP2         |
|                |                    | W/R  | 49 50 33  | 00~FF       | 00~FF       | Static IP Address 3   | IP3         |
|                |                    | W/R  | 49 50 34  | 00~FF       | 00~FF       | Static IP Address 4   | IP4         |
|                |                    | W/R  | 4D 4B 31  | 00~FF       | 00~FF       | Subnet Mask 1         | MK1         |
|                |                    | W/R  | 4D 4B 32  | 00~FF       | 00~FF       | Subnet Mask 2         | MK2         |
|                |                    | W/R  | 4D 4B 33  | 00~FF       | 00~FF       | Subnet Mask 3         | MK3         |
|                |                    | W/R  | 4D 4B 34  | 00~FF       | 00~FF       | Subnet Mask 4         | MK4         |
|                |                    | W/R  | 47 57 31  | 00~FF       | 00~FF       | Gateway 1             | GW1         |
|                |                    | W/R  | 47 57 32  | 00~FF       | 00~FF       | Gateway 2             | GW2         |
|                |                    | W/R  | 47 57 33  | 00~FF       | 00~FF       | Gateway 3             | GW3         |
|                |                    | W/R  | 47 57 34  | 00~FF       | 00~FF       | Gateway 4             | GW4         |
|                |                    | W/R  | 46 44 31  | 00~FF       | 00~FF       | DNS Address 1         | FD1         |
|                |                    | W/R  | 46 44 32  | 00~FF       | 00~FF       | DNS Address 2         | FD2         |
|                |                    | W/R  | 46 44 33  | 00~FF       | 00~FF       | DNS Address 3         | FD3         |
|                |                    | W/R  | 46 44 34  | 00~FF       | 00~FF       | DNS Address 4         | FD4         |
|                |                    | W    | 53 4E 53  | 0           | 0           | Save Network Settings | SNS         |
|                |                    | W    | 4D 41 43  | 00~05       | 00~FF       | Querying MAC ID #0~#5 | MAC         |



**NOTE** The command is valid on Power saving/ off mode. (The setting of "Wake Up from Sleep" must be "VGA, Digital, RS-232".)

## Using Discrete IR Codes

The display accepts commands in the form of infrared (IR) signals that conform to the NEC protocol. Each display remote control button has an IR control code associated with it.

You can use these codes to program a third-party, "universal" remote control unit to work with the display. These third-party products usually come with a computer software application for this purpose. For more information, consult the documentation provided with the remote control unit.

### IR Command Protocol

The IR control codes have the following characteristics:

Each code consists of the following:

- A leader pulse (a modulated pulse of 9 ms followed by a non-modulated pulse of 4.5 ms);
- 16 address bits (also called a "custom code"): eight (8) bits for the address followed by the logical inverse of the address. The custom code for the display is 16559 decimal (0x40AF, binary 01000000 10101111).
- 16 data bits: eight (8) bits for the command followed by the logical inverse of the command
- An end pulse (a modulated pulse of 0.56 ms, similar to the modulated pulse in the '0' and '1' bits). The end of the modulated pulse constitutes the end of the data transmission.

The carrier frequency is 38 kHz, with the modulated pulses having a 33% duty cycle.

Commands are sent at a maximum rate of 9 Hz.

For example, here is the NEC control code for the POWER button on the display remote control unit:

| Hex      | 40                | AF                | 1C       | E3                           |
|----------|-------------------|-------------------|----------|------------------------------|
| Binary   | 01000000          | 10101111          | 00011100 | 11100011                     |
| Function | Cust. Code Byte 1 | Cust. Code Byte 2 | Command  | Command<br>(Logical Inverse) |

### IR Control Code List

Table 6-3 lists the IR control codes for the display.

**Table 6-3. Infrared (IR) Control Codes**

| No. | Customer Code | Data Code | Function |
|-----|---------------|-----------|----------|
| 1   | 40AF          | 1CE3      | POWER    |
| 2   | 40AF          | 09F6      | OPS      |
| 3   | 40AF          | 07F8      | SOURCE   |
| 4   | 40AF          | 02FD      | UP       |
| 5   | 40AF          | 01FE      | LEFT     |
| 6   | 40AF          | 03FC      | RIGHT    |
| 7   | 40AF          | 19E6      | DOWN     |
| 8   | 40AF          | 0EF1      | ENTER    |
| 9   | 40AF          | 05FA      | EXIT     |
| 10  | 40AF          | 11EE      | Volume - |
| 11  | 40AF          | 16E9      | Volume + |
| 12  | 40AF          | 15EA      | MUTE     |
| 13  | 40AF          | 12ED      | MENU     |

|    |      |      |                  |
|----|------|------|------------------|
| 14 | 40AF | 0AF5 | BLANK            |
| 15 | 40AF | 0CF3 | FREEZE           |
| 16 | 40AF | 06F9 | LOW BLUE BRIGHT  |
| 17 | 40AF | 13EC | HIGH BLUE BRIGHT |
| 18 | 40AF | 14EB | AUTO             |
| 19 | 40AF | 00FF | SCALING          |

## 7. Specifications

Table 7-1 lists the signal types supported by each input on the **AVE-6520** display.

|                                   |                                                                                  |
|-----------------------------------|----------------------------------------------------------------------------------|
| <b>PANEL</b>                      |                                                                                  |
| <b>Diagonal Size (Inch)</b>       | 65"                                                                              |
| <b>Backlight</b>                  | Direct LED                                                                       |
| <b>Aspect Ratio</b>               | 16:9                                                                             |
| <b>Input Resolution</b>           | 3840 x 2160 @ 60 Hz                                                              |
| <b>Response Time</b>              | 8 (ms)                                                                           |
| <b>Brightness</b>                 | 350 (cd/m <sup>2</sup> )                                                         |
| <b>Contrast Ratio</b>             | 4000:1                                                                           |
| <b>Viewing Angle</b>              | 178° (H) / 178° (V)                                                              |
| <b>Supported Colours</b>          | 1.07 billion colours                                                             |
| <b>Display Orientation</b>        | Landscape compatible                                                             |
| <b>TOUCH SYSTEM</b>               |                                                                                  |
| <b>Interface</b>                  | Touch USB                                                                        |
| <b>Touch</b>                      | Surface IR touch; Up to 20 points                                                |
| <b>Glass</b>                      | Chemically strengthened glass with AGC&AF finish;<br>0.1-inch/2mm thickness      |
| <b>Supported Operating System</b> | Windows 7 / 8 / 10; Mac OS 10                                                    |
| <b>AUDIO</b>                      |                                                                                  |
| <b>Built-in Speakers</b>          | 8 Ω / 2 x 15W                                                                    |
| <b>CONNECTIVITY</b>               |                                                                                  |
| <b>Connections</b>                | 2x HDMI 2.0 / 1 x VGA / 1 x DisplayPort 1.2                                      |
| <b>Audio</b>                      | Audio In / Audio Out / SPDIF Out                                                 |
| <b>Control</b>                    | 2 x Touch USB/ IR Extender / RS232 / Ethernet / Service Port                     |
| <b>PHYSICAL SPECIFICATIONS</b>    |                                                                                  |
| <b>Dimensions</b>                 | 60.8 x 37.1 x 3.5 (in) / 1546.5 x 943.9 x 90.4(mm)                               |
| <b>Weight</b>                     | Net: 38.1 kg / Gross: 50.5 kg                                                    |
| <b>Wall Mount</b>                 | 23.6 x 15.7 (in) / 600 x 400(mm)                                                 |
| <b>OSD FUNCTIONS</b>              |                                                                                  |
| <b>OSD Languages</b>              | English, French, German, Dutch, Danish,<br>Italian, Swedish, Portuguese, Spanish |
| <b>OSD Key</b>                    | 7 keys                                                                           |
| <b>POWER</b>                      |                                                                                  |
| <b>Power Supply</b>               | AC 100-240V (Worldwide), Max 3.2A, 50/60Hz                                       |
| <b>Maximum Power Consumption</b>  | 190W                                                                             |
| <b>Standby</b>                    | ≤0.5 W                                                                           |
| <b>ENVIRONMENTAL</b>              |                                                                                  |
| <b>Operating Temperature</b>      | 0 °C ~ 40 °C                                                                     |
| <b>Storage Temperature</b>        | -20 °C ~ 55 °C                                                                   |
| <b>Humidity</b>                   | 30% ~ 85%                                                                        |

## Supported Timings

Table 7-2 lists the signal types supported by each input on the display.

**Table 7-2. Supported Timings By Input**

| Timing |                   | fH (kHz)  | fV (Hz) | Dot clock (MHz) | HDMI | VGA | DisplayPort |
|--------|-------------------|-----------|---------|-----------------|------|-----|-------------|
| VESA   | VGA 640x480       | 31.469    | 59.94   | 25.175          | ○    | ○   | ○           |
|        |                   | 37.861    | 72.809  | 31.5            | ○    | ○   | ○           |
|        |                   | 37.5      | 75      | 31.5            | ○    | ○   | ○           |
|        |                   | 43.269    | 85.008  | 36              | ○    | ○   | ○           |
|        | SVGA 800x600      | 35.156    | 56.25   | 36              | ○    | ○   | ○           |
|        |                   | 37.879    | 60.317  | 40              | ○    | ○   | ○           |
|        |                   | 48.077    | 72.188  | 50              | ○    | ○   | ○           |
|        |                   | 46.875    | 75      | 49.5            | ○    | ○   | ○           |
|        |                   | 53.674    | 85.06   | 56.25           | ○    | ○   | ○           |
|        | XGA 1024x768      | 48.363    | 60.004  | 65              | ○    | ○   | ○           |
|        |                   | 56.476    | 70.069  | 75              | ○    | ○   | ○           |
|        |                   | 60.023    | 75.029  | 78.75           | ○    | ○   | ○           |
|        |                   | 68.677    | 84.997  | 94.5            | ○    | ○   | ○           |
|        | WXGA 1366x768     | 47.712    | 59.79   | 85.5            | ○    | ○   | ○           |
|        | 1280 x 720        | 44.444    | 59.98   | 64              | -    | ○   | ○           |
|        |                   | 44.772    | 59.86   | 74.5            | -    | ○   | ○           |
|        |                   | 56.456    | 74.78   | 95.75           | -    | ○   | ○           |
|        | 1280 x 768        | 47.776    | 59.87   | 79.5            | -    | ○   | ○           |
|        |                   | 47.396    | 59.995  | 68.25           | -    | ○   | ○           |
|        |                   | 68.633    | 84.837  | 117.5           | -    | ○   | ○           |
|        | 1280 x 800        | 49.306    | 59.91   | 71              | ○    | ○   | ○           |
|        |                   | 49.702    | 59.81   | 83              | ○    | ○   | ○           |
|        | SXGA              | 1152x864  | 67.5    | 75              | ○    | ○   | ○           |
|        |                   |           | 63.981  | 60.02           | ○    | ○   | ○           |
|        |                   | 1280x1024 | 79.976  | 75.025          | ○    | ○   | ○           |
|        |                   |           | 91.146  | 85.024          | -    | ○   | ○           |
|        | 1440 x 900        |           | 55.469  | 59.901          | -    | -   | ○           |
|        |                   |           | 55.935  | 59.88           | ○    | ○   | ○           |
|        | WSXGA+ 1680 x1050 |           | 64.674  | 59.883          | ○    | ○   | ○           |
|        |                   |           | 65.29   | 59.954          | ○    | ○   | ○           |
|        | UXGA 1600 x 1200  |           | 75      | 60              | ○    | ○   | ○           |
|        | 1920 x 1080       |           | 66.587  | 59.93           | -    | ○   | ○           |
|        | WUXA 1920 x 1200  |           | 74.038  | 59.95           | -    | ○   | ○           |
|        | QHD 2560x1440     |           | 88.787  | 59.951          | ○    | -   | ○           |
|        |                   |           | 89.521  | 59.961          | -    | -   | ○           |
|        | QSXGA 2560x1600   |           | 98.713  | 59.972          | ○    | -   | ○           |
|        |                   |           | 99.458  | 59.987          | -    | -   | ○           |
| EDTV   | 480p              |           | 31.5    | 60              | ○    | -   | ○           |
|        | 576p              |           | 31.25   | 50              | ○    | -   | ○           |
| HDTV   | 720p              |           | 37.5    | 50              | ○    | -   | ○           |
|        | 1280x720          |           | 44.995  | 59.94           | ○    | -   | ○           |
|        |                   |           | 45      | 60              | ○    | -   | ○           |
|        | 1080i             |           | 28.13   | 50              | ○    | -   | ○           |
|        | 1920x1080         |           | 33.716  | 59.94           | ○    | -   | ○           |
|        |                   |           | 33.75   | 60              | ○    | -   | ○           |
|        | 1080p 1920x1080   |           | 27      | 24              | ○    | -   | ○           |

| Timing | fH (kHz)        | fV (Hz) | Dot clock (MHz) | HDMI    | VGA | DisplayPort | Timing |
|--------|-----------------|---------|-----------------|---------|-----|-------------|--------|
| HDTV   | 1080p 1920x1080 | 28.125  | 25              | 74.25   | ○   | -           | ○      |
|        |                 | 33.75   | 30              | 74.25   | ○   | -           | ○      |
|        |                 | 56.25   | 50              | 148.5   | ○   | -           | ○      |
|        |                 | 67.433  | 59.94           | 148.352 | ○   | -           | ○      |
|        |                 | 67.5    | 60              | 148.5   | ○   | ○           | ○      |
| 4K2K   | 3840x2160       | 54      | 24              | 297     | ○   | -           | ○      |
|        |                 | 56.25   | 25              | 297     | ○   | -           | ○      |
|        |                 | 67.5    | 30              | 297     | ○   | -           | ○      |
|        |                 | 110.5   | 49.977          | 442     | -   | -           | ○      |
|        |                 | 112.5   | 50              | 594     | -   | -           | ○      |
|        |                 | 133.313 | 59.997          | 533.25  | -   | -           | ○      |
|        |                 | 135     | 60              | 594     | -   | -           | ○      |

# Overall Dimensions

Figure 7-1 shows the display dimensions of **AVE-6520** (all dimensions are in inches).


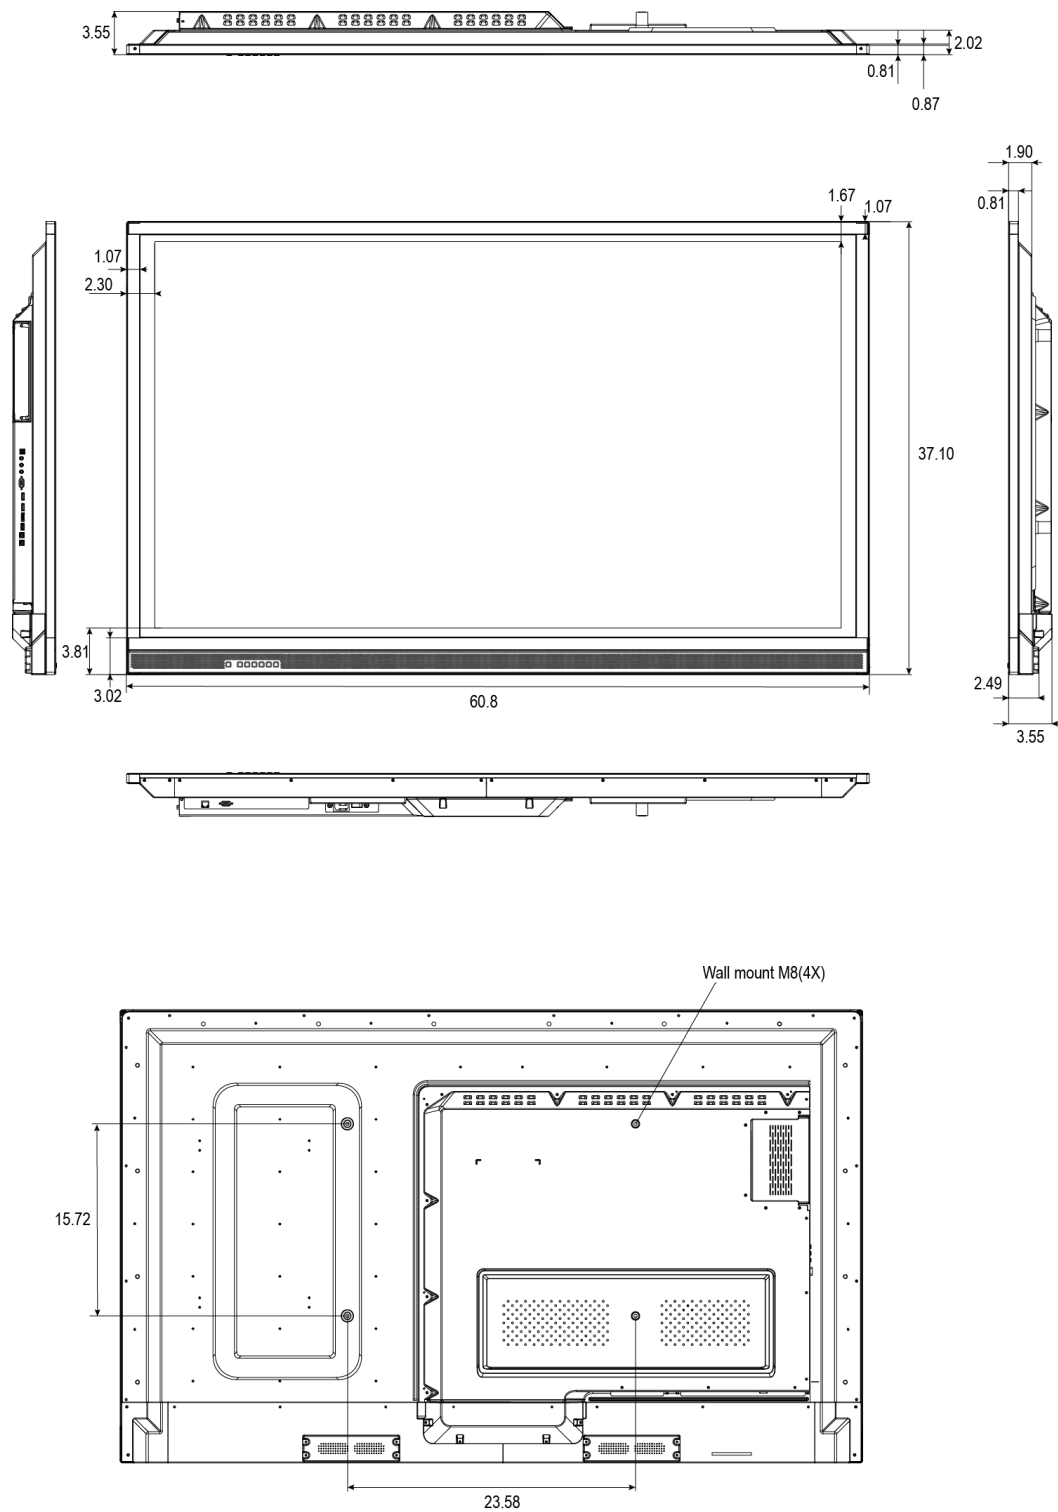


Figure 7-1. AVE-6520 Display Dimensions (inch)

Figure 7-2 shows the display dimensions of **AVE-6520** (all dimensions are in millimeters).

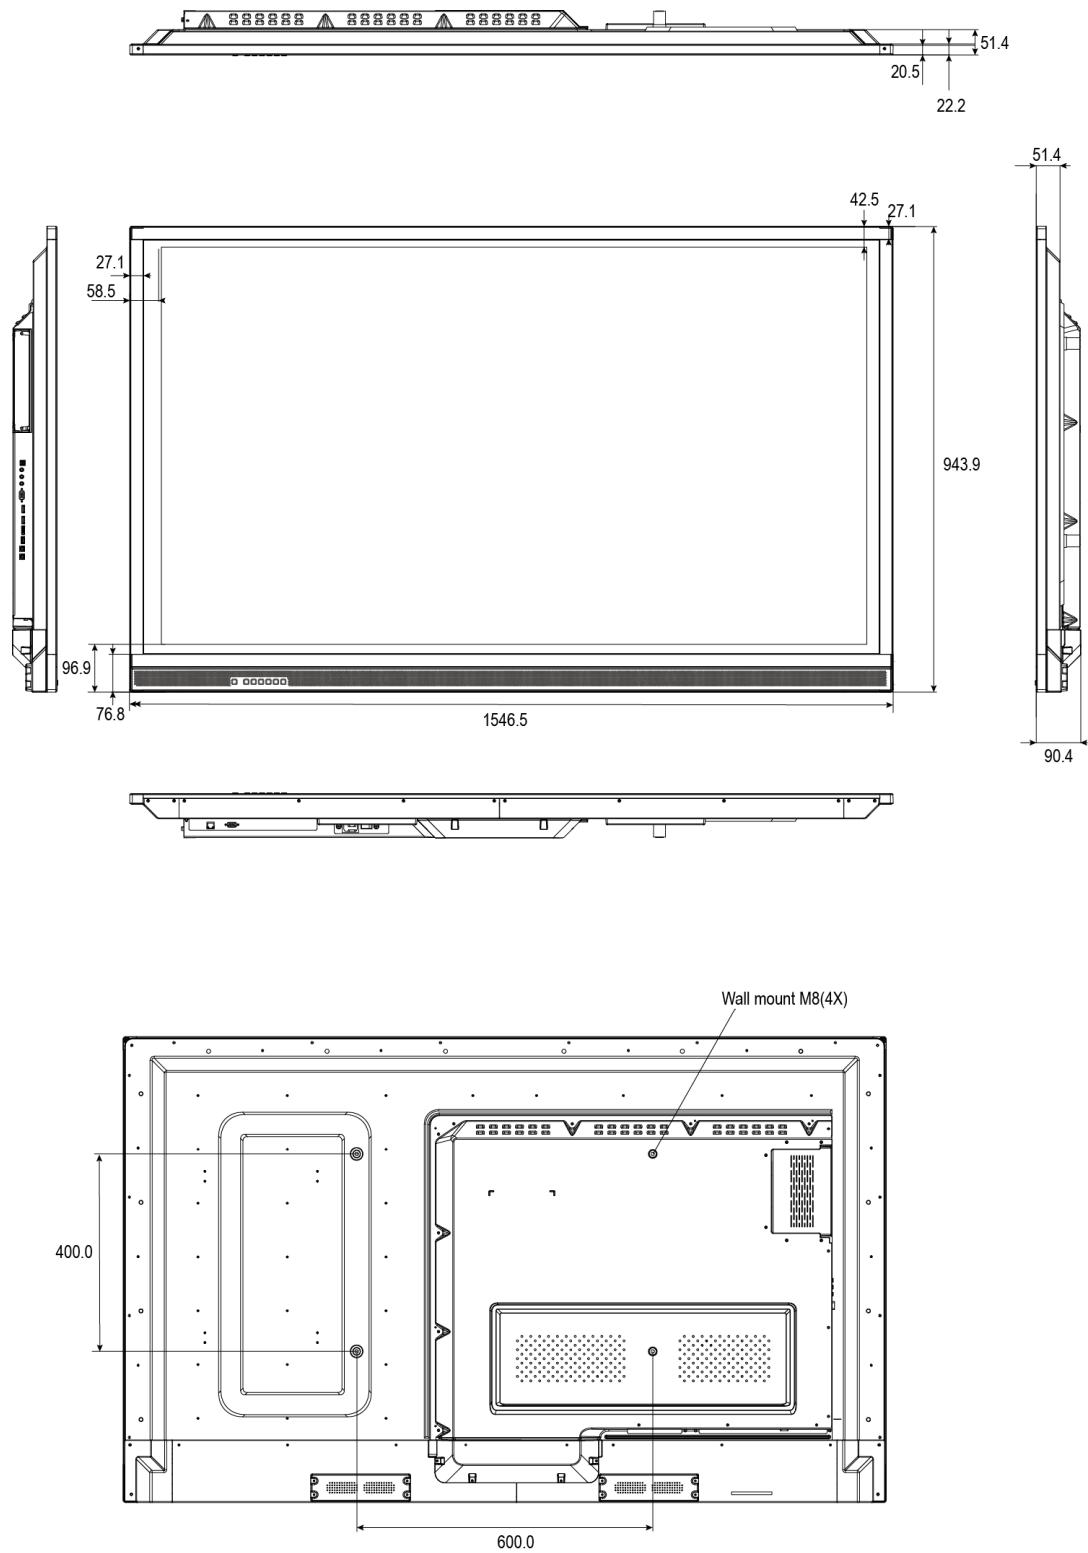


**Figure 7-2. AVE-6520 Display Dimensions (mm)**

## Notes

# Appendix I: Moving and Carrying Notice

## Moving the Display

Moving the display requires at least two people. Attempting to move the display with one person may result in dropping the display and/or serious injury. When moving a display in its shipping carton, lift the carton using the handles.

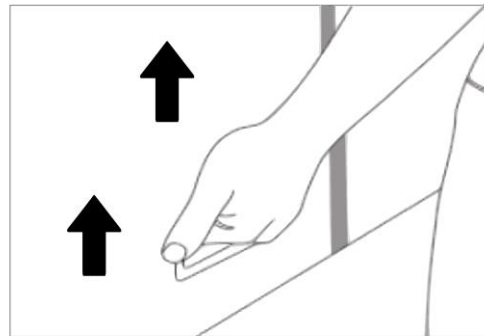

## Carrying the Display

This display is heavy; please follow proper lifting technique, as pictured below. Failure to do so may cause injury.



# Appendix II: Installing a Wall Mount

Follow the manual instructions for the type of mount you have selected. Refer all servicing to qualified service personnel.

Moving the display requires at least two people. Make sure while lifting or moving the display, to avoid touching the front panel during the move.


Before installing, please make sure the wall is strong enough to hold the necessary weight of the display and the mount.

**Step1.** Keep the display facing the ground and place it on a flat object.

**Step2.** Remove the screws (M8\*15) from the back of the display.

**Step3.** Align the wall brackets with the mounting holes and attach the brackets to the display using the screws removed in Step 2.

**Caution:** Longer screws will damage the display.

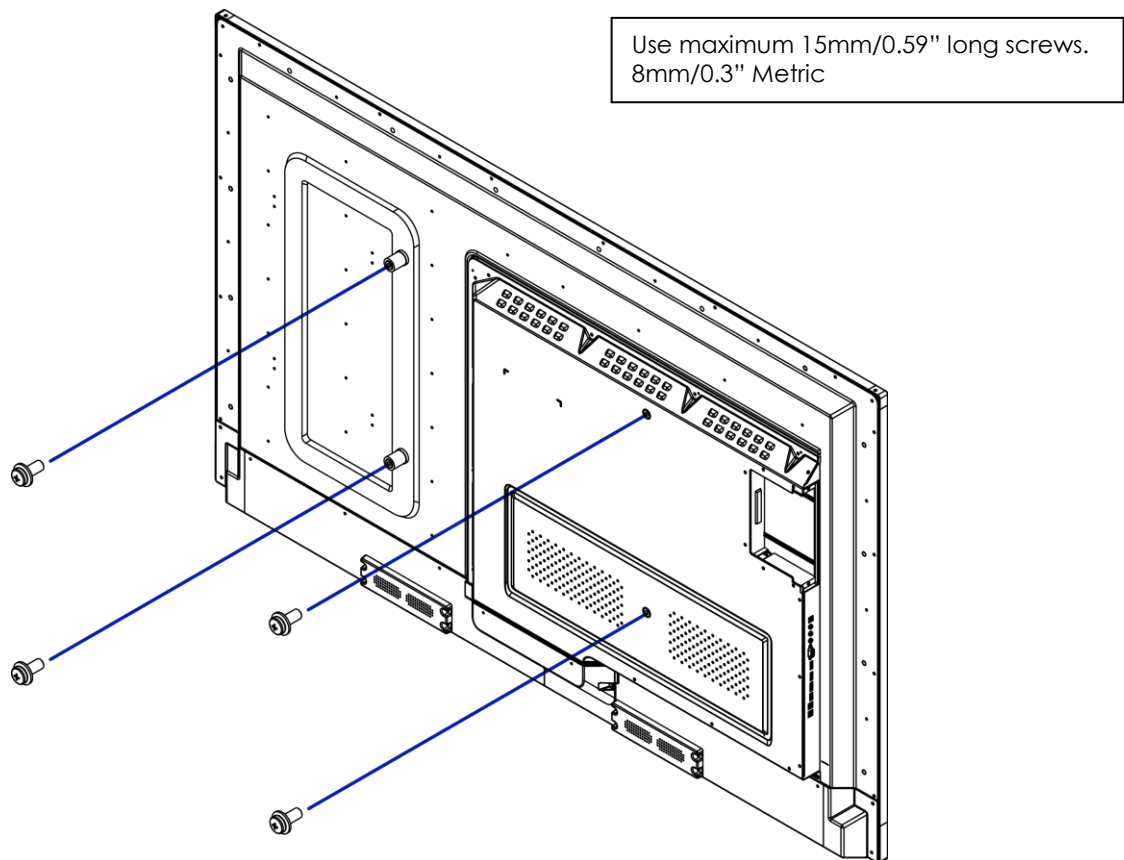

## NOTE


To safely mount the display on a wall:

- Use only the approved wall-mount kit designed for the display.
- Make sure the tilt degree of the wall does not exceed 10 degrees.

# Appendix III: Installing an OPS Module

Follow the steps below to install an OPS module.

- Step 1** Ensure that the display is turned off (power socket on rear of display).
- Step 2** Use a screw driver to unscrew the OPS slot cover on the display input panel. Do not lose the screws (M4\*6) that are removed.
- Step 3** Install the OPS module by sliding it gently into the OPS slot until you hear a click, indicating the module is securely inserted. When using an Avocor OPS PC, the fan should be facing to the backside of the display. Do not apply by force.
- Step 4** Secure the OPS module in position, by screwing it onto the display input panel using the screws (M4\*6) that were removed earlier.
- Step 5** Turn on the interactive display. When using an Avocor OPS PC a green light on the side of the OPS PC should appear, indicating that the OPS PC is switched on and operational.


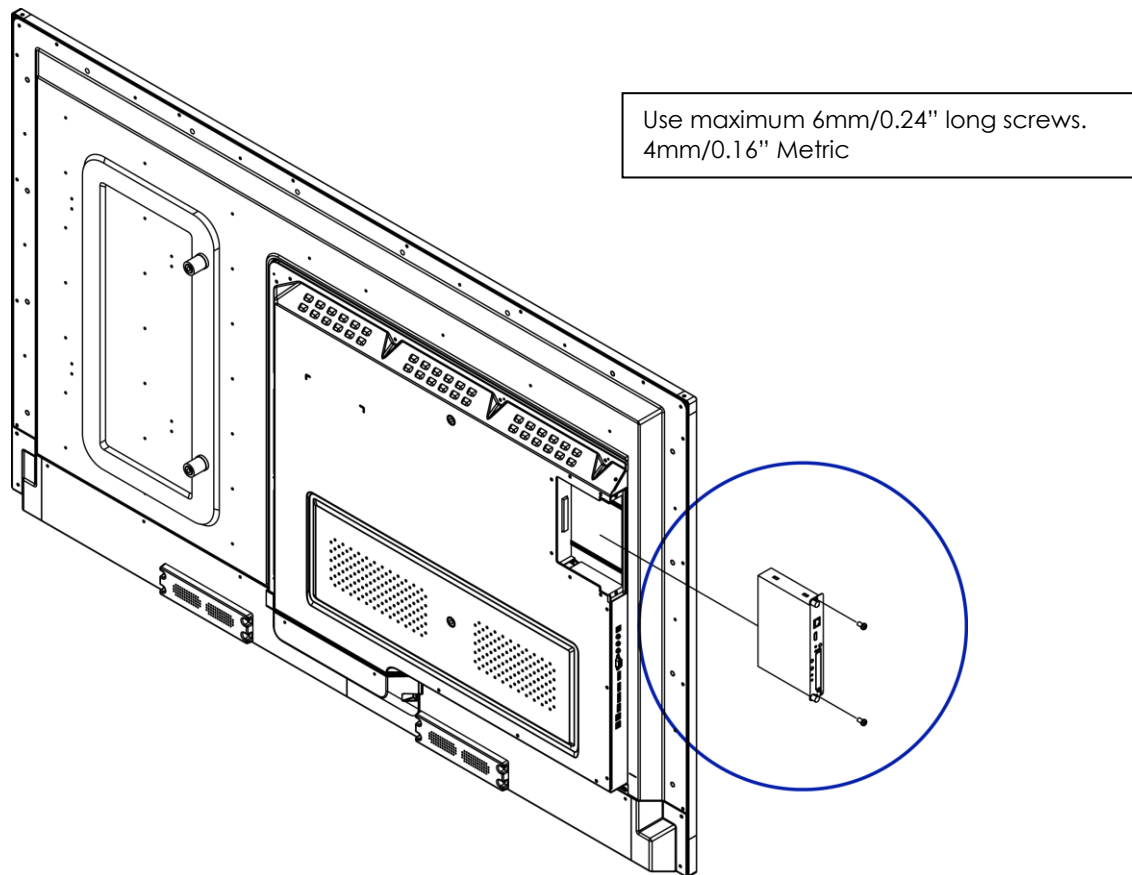


## NOTE



- When installing or uninstalling an OPS PC, the display must be switched off. If the display is on when performing the installation or uninstallation of the OPS PC, this could cause damage to either the display or OPS PC invalidating the warranty for both.
- The right bottom handle can be unscrewed for OPS module installation. Please reinstall the handle after inserting the OPS module.

## Appendix IV: Wall Mount Safety Notes



1. Please make sure if the bracket is fixed to the solid wall / solid pillar for fear of falling due to heavy weight.

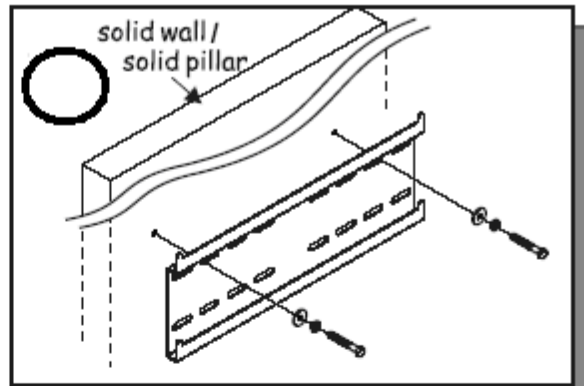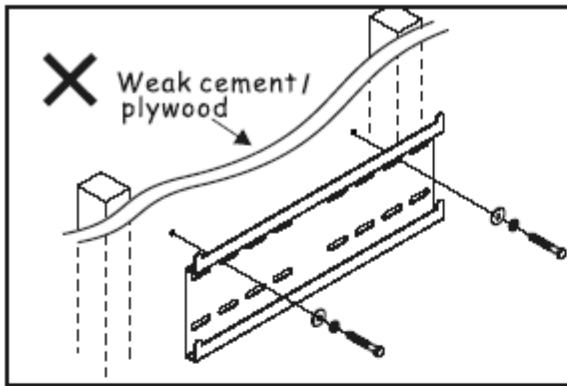

2. After assembling, please don't pull or shake violently.

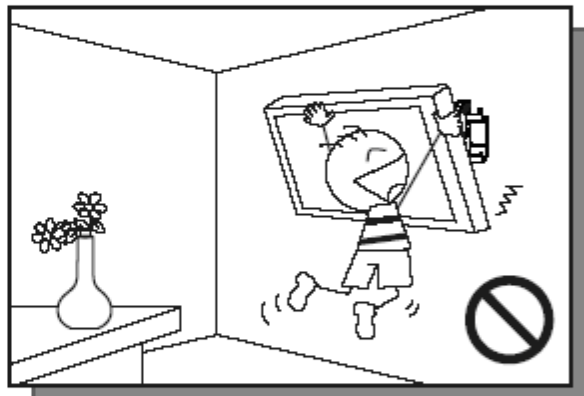
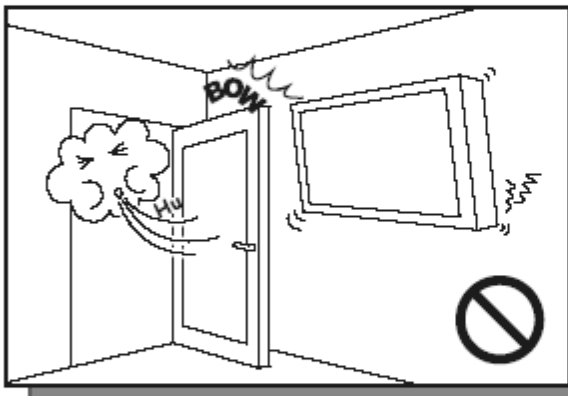


3. Please don't install the bracket directly under the sunshine or humidity / high temperature places for fear that the quality is effected.

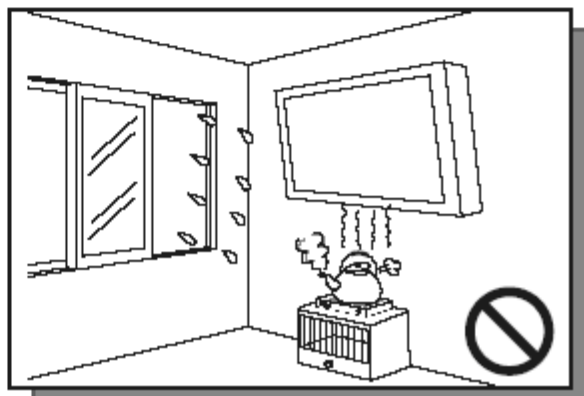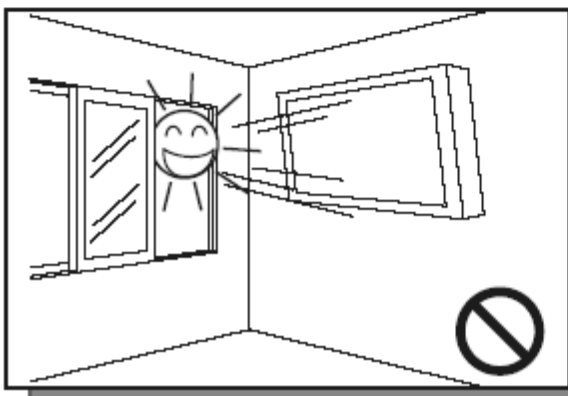


#### 4.

Installing the bracket over 10 cm from each wall side and being vertical to the ground is the suggested installing position.

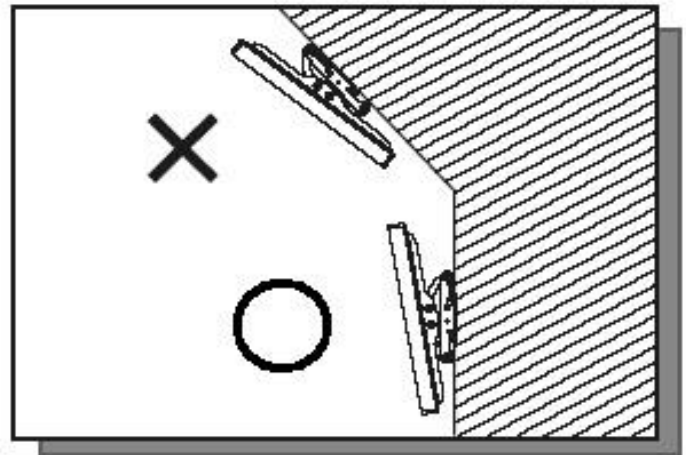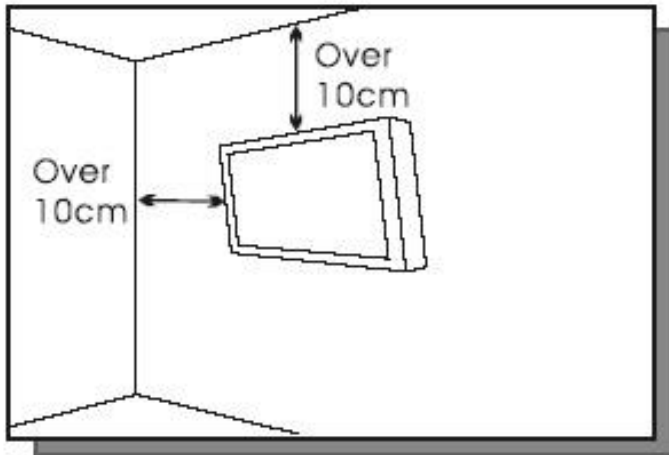


#### 5.

Please make sure to hang on the mounting hooks firmly.

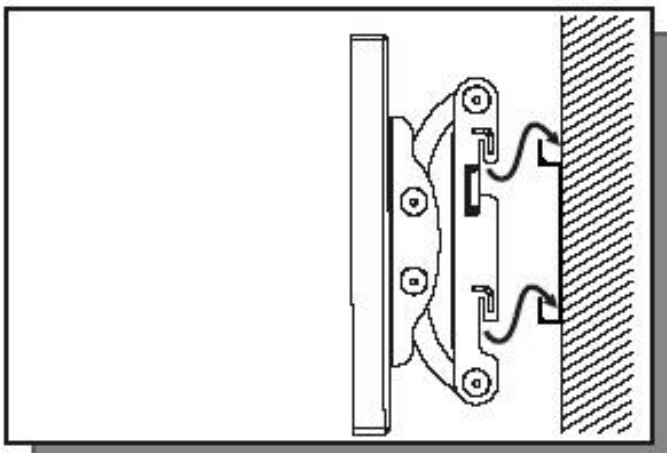

#### 6.

The flat screen must be put in the mid of the bracket for fear of slope.

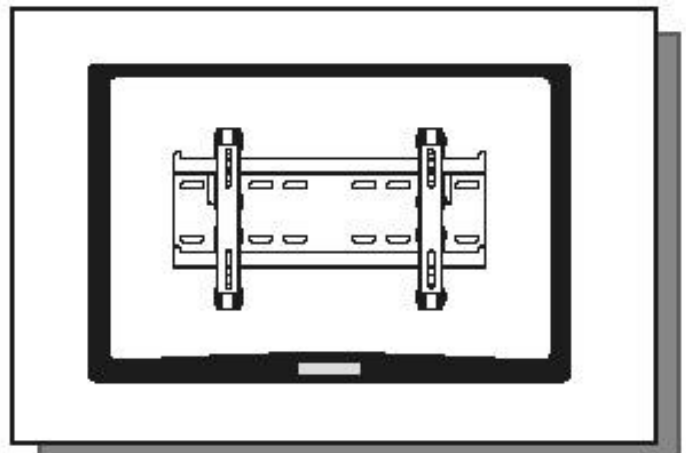

# Appendix V: Ethernet Remote Control Settings

The device can be controlled by opening a browser and connecting to web server directly.

1. Open a browser and type the IP address :192.168.2.1 into the address bar and enter.
2. The browser will prompt the small window which will ask for your username and password.

**USER LOG IN**

Site: 192.168.2.1

ID:

Password:

OK

Enter the username and password to login by using the following information then click the **OK** button.

|                  |             |
|------------------|-------------|
| Default IP       | 192.168.2.1 |
| Default ID       | admin       |
| Default Password | system      |

## Configurations

### Administrator

#### Authentication Configuration

##### Administrator

[Authentication Configuration](#)

[System IP Configuration](#)

[Network Status](#)

[Display Status](#)

[Load default setting](#)

[Firmware update](#)

[Boot Loader upgrade](#)

[TCP Mode](#)

[UDP Mode](#)

[UART](#)

[SMTP](#)

[Reset Device](#)

[Logout](#)

#### Authentication Configuration

| Setting                                                                 | Value                                                                                   |
|-------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|
| Username                                                                | <input type="text" value="admin"/> max:15                                               |
| Password Confirm                                                        | <input type="password" value="....."/> max:15<br><input type="password" value="....."/> |
| <div>Update</div> Please refresh web page after press "updated" button. |                                                                                         |

Note:

Comment name only can use "0-9", "a-z", "A-Z"

## System IP Configuration

### Administrator

[Authentication](#)[Configuration](#)[System IP](#)[Configuration](#)[Network Status](#)[Display Status](#)[Load default setting](#)[Firmware update](#)[Boot Loader upgrade](#)[TCP Mode](#)[UDP Mode](#)[UART](#)[SMTP](#)[Reset Device](#)[Logout](#)

## System IP Configuration

| Setting                                                                        | Value                                                                                                                                                                                                                          |
|--------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IP Address                                                                     | <input type="text" value="192"/> <input type="text" value="."/> <input type="text" value="168"/> <input type="text" value="."/> <input type="text" value="2"/> <input type="text" value="."/> <input type="text" value="1"/>   |
| Subnet Mask                                                                    | <input type="text" value="255"/> <input type="text" value="."/> <input type="text" value="255"/> <input type="text" value="."/> <input type="text" value="255"/> <input type="text" value="."/> <input type="text" value="0"/> |
| Gateway                                                                        | <input type="text" value="192"/> <input type="text" value="."/> <input type="text" value="168"/> <input type="text" value="."/> <input type="text" value="2"/> <input type="text" value="."/> <input type="text" value="1"/>   |
| DNS                                                                            | <input type="text" value="192"/> <input type="text" value="."/> <input type="text" value="168"/> <input type="text" value="."/> <input type="text" value="2"/> <input type="text" value="."/> <input type="text" value="1"/>   |
| IP Configure                                                                   | <input type="radio"/> Static <input checked="" type="radio"/> DHCP                                                                                                                                                             |
| VLAN Tag                                                                       | <input checked="" type="radio"/> Disable <input type="radio"/> Enable : VLAN ID <input type="text" value="0"/>                                                                                                                 |
| <div>Update</div> <p>Please refresh web page after press "updated" button.</p> |                                                                                                                                                                                                                                |

## Network Status

### Administrator

[Authentication](#)[Configuration](#)[System IP](#)[Configuration](#)[Network Status](#)[Display Status](#)[Load default setting](#)[Firmware update](#)[Boot Loader upgrade](#)[TCP Mode](#)[UDP Mode](#)[UART](#)[SMTP](#)[Reset Device](#)[Logout](#)

## Network Status

|                |                                                                                                                     |
|----------------|---------------------------------------------------------------------------------------------------------------------|
| Kernel Version | V3021 (Feb 17 2014 14:42:18)                                                                                        |
| MAC Address    | 00:1F:B6:00:01:DB                                                                                                   |
| Nickname       | <input type="text" value="NetUART"/> <div>Update</div> <p>Please refresh web page after press "updated" button.</p> |

Note:

Comment name only can use "0-9", "a-z", "A-Z", "\_", "-"

## Load Default Setting

### Administrator

[Authentication](#)[Configuration](#)[System IP](#)[Configuration](#)[Network Status](#)[Display Status](#)[Load default setting](#)[Firmware update](#)[Boot Loader upgrade](#)[TCP Mode](#)[UDP Mode](#)[UART](#)[SMTP](#)[Reset Device](#)[Logout](#)

Load Default Setting to EEPROM

Load

## Firmware Update

### Administrator

[Authentication](#)

[Configuration](#)

[System IP](#)

[Configuration](#)

[Network Status](#)

[Display Status](#)

[Load default setting](#)

[Firmware update](#)

[Boot Loader upgrade](#)

[TCP Mode](#)

[UDP Mode](#)

[UART](#)

[SMTP](#)

[Reset Device](#)

[Logout](#)

### Firmware update

Load

## Boot Loader Upgrade

### Administrator

[Authentication](#)

[Configuration](#)

[System IP](#)

[Configuration](#)

[Network Status](#)

[Display Status](#)

[Load default setting](#)

[Firmware update](#)

[Boot Loader upgrade](#)

[TCP Mode](#)

[UDP Mode](#)

[UART](#)

[SMTP](#)

[Reset Device](#)

[Logout](#)

### Upgrade the Boot Loader

Load

## TCP Mode

### Administrator

[Authentication Configuration](#)

[System IP Configuration](#)

[Network Status](#)

[Display Status](#)

[Load default setting](#)

[Firmware update](#)

[Boot Loader upgrade](#)

### TCP Mode

### UDP Mode

### UART

### SMTP

[Reset Device](#)

[Logout](#)

## TCP Control

| Item                                                                           | Value                                                                                                                                                                                                                                    |
|--------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Telnet Server/Client                                                           | <input checked="" type="radio"/> Server <input type="radio"/> Client <input type="radio"/> Disable                                                                                                                                       |
| Data Port Number                                                               | <input type="text" value="23"/>                                                                                                                                                                                                          |
| Remote Server IP Address                                                       | <input checked="" type="radio"/> IP <input type="text" value="210"/> <input type="text" value="200"/> <input type="text" value="181"/> <input type="text" value="102"/> <input type="radio"/> Domain Name <input type="text" value="0"/> |
| Client mode inactive timeout                                                   | <input type="text" value="20"/> minute (1~99,0=Disable)                                                                                                                                                                                  |
| Server mode protect timeout                                                    | <input type="text" value="60"/> minute (1~98,0=Disable,99=Can't replace)                                                                                                                                                                 |
| <div>Update</div> <p>Please refresh web page after press "updated" button.</p> |                                                                                                                                                                                                                                          |

### Telnet Server/Client

Set the device to be a Telnet Server or Client.

### Port Number

When in Server mode, assign the port number used to connect remotely. When in Client mode, assign the port number for the device to connect to the remote site.

### Remote Server IP Address

When in Client mode, the device will connect to the remote server with the IP address set here.

### Client mode inactive timeout

When NET2UAR is operating in TCP client mode, it will always try to connect with the remote server. The time configured here is for NET2UART to rebuild connection after timeout.

### Server mode protect timeout

When NET2UART is operating in TCP server mode, it would protect the TCP connection from getting replaced in the period of the time set here.

## UDP Mode

### Administrator

[Authentication](#)[Configuration](#)[System IP](#)[Configuration](#)[Network Status](#)[Display Status](#)[Load default setting](#)[Firmware update](#)[Boot Loader upgrade](#)[TCP Mode](#)[UDP Mode](#)[UART](#)[SMTP](#)[Reset Device](#)[Logout](#)

### UDP

| Item                                                  | Value                                                                                                                                                                                                                                     |                                |
|-------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|
| Mode                                                  | <input type="radio"/> Listen <input type="radio"/> Normal <input checked="" type="radio"/> Disable                                                                                                                                        |                                |
| Local Port                                            | <input type="text" value="21"/>                                                                                                                                                                                                           |                                |
| Remote Address                                        | IP                                                                                                                                                                                                                                        | Port                           |
|                                                       | <input checked="" type="radio"/> <input type="text" value="0"/> . <input type="text" value="0"/> . <input type="text" value="0"/> . <input type="text" value="0"/> IP<br><input type="radio"/> <input type="text" value="0"/> Domain Name | <input type="text" value="0"/> |
|                                                       | <input checked="" type="radio"/> <input type="text" value="0"/> . <input type="text" value="0"/> . <input type="text" value="0"/> . <input type="text" value="0"/> IP<br><input type="radio"/> <input type="text" value="0"/> Domain Name | <input type="text" value="0"/> |
|                                                       | <input checked="" type="radio"/> <input type="text" value="0"/> . <input type="text" value="0"/> . <input type="text" value="0"/> . <input type="text" value="0"/> IP<br><input type="radio"/> <input type="text" value="0"/> Domain Name | <input type="text" value="0"/> |
|                                                       | <input checked="" type="radio"/> <input type="text" value="0"/> . <input type="text" value="0"/> . <input type="text" value="0"/> . <input type="text" value="0"/> IP<br><input type="radio"/> <input type="text" value="0"/> Domain Name | <input type="text" value="0"/> |
|                                                       | <input checked="" type="radio"/> <input type="text" value="0"/> . <input type="text" value="0"/> . <input type="text" value="0"/> . <input type="text" value="0"/> IP<br><input type="radio"/> <input type="text" value="0"/> Domain Name | <input type="text" value="0"/> |
|                                                       | <input checked="" type="radio"/> <input type="text" value="0"/> . <input type="text" value="0"/> . <input type="text" value="0"/> . <input type="text" value="0"/> IP<br><input type="radio"/> <input type="text" value="0"/> Domain Name | <input type="text" value="0"/> |
|                                                       | <input checked="" type="radio"/> <input type="text" value="0"/> . <input type="text" value="0"/> . <input type="text" value="0"/> . <input type="text" value="0"/> IP<br><input type="radio"/> <input type="text" value="0"/> Domain Name | <input type="text" value="0"/> |
|                                                       | <input checked="" type="radio"/> <input type="text" value="0"/> . <input type="text" value="0"/> . <input type="text" value="0"/> . <input type="text" value="0"/> IP<br><input type="radio"/> <input type="text" value="0"/> Domain Name | <input type="text" value="0"/> |
|                                                       | <input checked="" type="radio"/> <input type="text" value="0"/> . <input type="text" value="0"/> . <input type="text" value="0"/> . <input type="text" value="0"/> IP<br><input type="radio"/> <input type="text" value="0"/> Domain Name | <input type="text" value="0"/> |
| <input type="button" value="Update"/>                 |                                                                                                                                                                                                                                           |                                |
| Please refresh web page after press "updated" button. |                                                                                                                                                                                                                                           |                                |

### Status

When TCP mode is set as Server mode or Client mode, the UDP mode would be disabled automatically, and vice versa.

### Local Port

Assign the port number here to allow the device to open for the remote site to send data via UDP. The IP address of the remote site must be set in the Remote Address table, or NET2UART will ignore its data.

### Remote Address

The Remote Address table allows 10 entries of remote site IP addresses and ports. When NET2UART is sending data to network, the data will be sent to the each remote IP address entered in the table simultaneously. The port number is the remote site port number that NET2UART will send data to via UDP.

If the port number is set as "0", the NET2UART will use the port number that the remote site sends data from as the destination port number, or use the local port number as the destination port number if the remote site has not sent data to NET2UART.

## UART

### Administrator

[Authentication](#)

[Configuration](#)

[System IP](#)

[Configuration](#)

[Network Status](#)

[Display Status](#)

[Load default setting](#)

[Firmware update](#)

[Boot Loader upgrade](#)

[TCP Mode](#)

[UDP Mode](#)

[UART](#)

[SMTP](#)

[Reset Device](#)

[Logout](#)

### UART Control

| Item                                                                                           | Setting                                                                                                                                                                                                                                                                        |
|------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mode                                                                                           | <input type="text" value="Rs232"/>                                                                                                                                                                                                                                             |
| Baudrate                                                                                       | <input type="text" value="115200"/>                                                                                                                                                                                                                                            |
| Character Bits                                                                                 | <input type="text" value="8"/>                                                                                                                                                                                                                                                 |
| Parity Type                                                                                    | <input type="text" value="none"/>                                                                                                                                                                                                                                              |
| Stop Bit                                                                                       | <input type="text" value="1"/>                                                                                                                                                                                                                                                 |
| Hardware Flow Control                                                                          | <input type="text" value="none"/>                                                                                                                                                                                                                                              |
| Uart Memory Overflow count                                                                     | 0M,0K,0Byte                                                                                                                                                                                                                                                                    |
| Uart FIFO Overflow count                                                                       | 0times                                                                                                                                                                                                                                                                         |
| Delimiter                                                                                      | <input type="checkbox"/> Character 1: <input type="text" value="00"/> , <input type="checkbox"/> Character 2: <input type="text" value="FF"/><br><input type="checkbox"/> Silent time: <input type="text" value="5"/> (1~255)*200ms<br><input type="checkbox"/> Drop Character |
| <input type="button" value="Update"/><br>Please refresh web page after press "updated" button. |                                                                                                                                                                                                                                                                                |

### Mode

Select the UART interface.

### Baud rate

Select the baud rate of UART interface.

### Character Bits

Select the number of character bits of UART interface.

### Parity Type

Select the parity type of UART interface.

### Stop Bit

Select the stop bit type of UART interface.

### Hardware Flow Control

Select the flow control type of UART interface. The hardware flow control will use CTS/RTS for the control signals.

### Uart Memory Overflow count

Shows the number of overflow bytes in network buffer.

### Uart FIFO Overflow count

Shows the number of overflow times in UART RX buffer.

## Delimiter

- Character 1 & 2:

Set Character 1 and/or Character 2 to be the delimiter.

Once the delimiter is active, NET2UART would monitor all data received from UART. All data received from UART will be stored in NET2UART internal buffer first, and will only be sent to Ethernet once the delimiter is detected. If the delimiters have not been detected and the internal buffer of NET2UART is stuffed, the incoming data will overwrite the previous data stored in NET2UART.

- Drop Character:

The Drop Character is set to drop delimiter or not. If Drop Character is active, the delimiter received from UART will not be sent out to Ethernet.

- Silent time:

Once the Silent time is active, NET2UART will keep all data received from UART in its internal buffer and check the time period of no data received from UART. It will then send out the internal data once the time is out.

## SMTP

### Administrator

[Authentication  
Configuration](#)

[System IP  
Configuration](#)

[Network Status](#)

[Display Status](#)

[Load default setting](#)

[Firmware update](#)

[Boot Loader upgrade](#)

[TCP Mode](#)

[UDP Mode](#)

[UART](#)

[SMTP](#)

[Reset Device](#)

[Logout](#)

### SMTP setup

|                        |                                                                       |
|------------------------|-----------------------------------------------------------------------|
| Enable SMTP            | <input type="checkbox"/> Enable,Port: 25                              |
| SMTP server address    | smtp.xxx.yyy                                                          |
| SMTP Login Information | <input type="checkbox"/> Enable<br>Username: username,Password: ..... |
| Mail to                | xxx@yyy.zzz<br>max: 200                                               |
| Mail from              | xxx@yyy.zzz                                                           |

|                 |                           |
|-----------------|---------------------------|
| SMTP 01 Warning |                           |
| Subject         | Power Status Change Alert |
| Message Body    | SMTP 01 body<br>max: 100  |

|                 |                          |
|-----------------|--------------------------|
| SMTP 02 Warning |                          |
| Subject         | Source Change Alert      |
| Message Body    | SMTP 02 body<br>max: 100 |

|                 |                          |
|-----------------|--------------------------|
| SMTP 03 Warning |                          |
| Subject         | Signal Lost Alert        |
| Message Body    | SMTP 03 body<br>max: 100 |

## Reset Device

Reset NET2UART module.

Administrator

TCP Mode

UDP Mode

UART

SMTP

Reset Device

Logout

Reset Device

Reset